

# ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025 and EN 15804+A2 

**Carlisle Construction Materials GmbH**  
**Alutrix FR®**



**Owner of the declaration**

Carlisle Construction Materials GmbH  
Gothaer Straße 44  
99880 Waltershausen  
Germany

**Product**

Alutrix FR®

**Declared product / Functional unit**

1 m<sup>2</sup>

**This declaration is based on Product  
Category Rules**

EN 15804:2012 + A2:2019,  
NPCR 022 Part B for roof waterproofing  
(v2)

**Program operator:**

EPD Norway  
Majorstuen P.O. Box 5250  
N-0303 Oslo  
Norway

**Declaration number**

NEPD-10171-10171-2

**Registration number**

NEPD-10171-10171-2

**Issue date**

01.08.2025

**Valid to**

31.07.2030

**EPD Software**

Emidat EPD Tool v1.0.0

## General Information

### Product

Alutrix FR®

### Program Operator

EPD Norway  
Majorstuen P.O. Box 5250  
N-0303 Oslo  
Norway  
Phone: +47 23 08 80 00  
Email: post@epd-norge.no

### Declaration Number

NEPD-10171-10171-2

### This declaration is based on Product Category Rules

EN 15804:2012 + A2:2019,  
NPCR 022 Part B for roof waterproofing (v2)

### Statements

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer, life cycle assessment data and evidences.

### Functional unit

1 m<sup>2</sup> with a reference service life of 30 years

### General information on verification of EPD from EPD tools

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPDNorway's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD-Norway, and iii) the process is reviewed annually by an independent third party verifier. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools.

### Verification of EPD tool

Charlotte Merlin, FORCE Technology  
(no signature required)

### Owner of the declaration

Carlisle Construction Materials GmbH

### Contact person

andreas.koellner@ccm-europe.com

### Phone

01755837403

### Email

andreas.koellner@ccm-europe.com

### Manufacturer

Carlisle Construction Materials GmbH  
Gothaer Straße 44  
99880 Waltershausen, Germany

### Place of production

Waltershausen, Germany

### Management system

ISO 9001, ISO 14001, ISO 50001

### Issue date

01.08.2025

### Valid to

31.07.2030

### Year of study

2024

### Comparability

EPDs of construction products may not be comparable if they do not comply with EN 15804 and are not seen in a building context. EPD data may not be comparable if the datasets used are not developed in accordance with EN 15804 and if the background systems are not based on the same database (including primary and secondary data).

### Development and verification of EPD

The declaration was created using the Emidat EPD tool v1.0, developed by Emidat GmbH. The EPD tool has been approved by EPD Norway.

Developer of EPD: Andreas Kollner

Reviewer of company-specific input data and EPD: Nils Sperfeld

### Approved




Håkon Hauan, CEO EPD-Norge

## Product

### Product description

ALUTRIX® FR is a vapour barrier membrane that is quick to install, self-adhesive and extremely resistant. They consist of a reinforced aluminium material with a self-adhesive reverse side and detachable release film. It is particularly suitable for use on profile steel sheets. In addition Alutrix® FR is FM approved and has a reduced fire load according to DIN 18234.

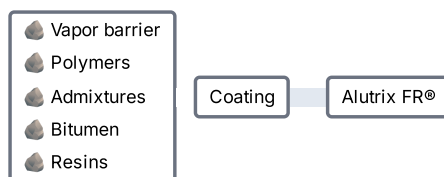

Vapor barriers are widely used in construction and civil engineering for their excellent properties. They are applied in various areas to prevent water ingress and protect structures from moisture-related damage.

### Product specification

Name of ingredient	Share of total weight	Country of origin
Admixtures	25 - 50 %	Germany
Bitumen	25 - 50 %	Germany
Polymers	2 - 10 %	Germany
Resins	2 - 10 %	Various
Vapor barrier	10 - 25 %	Germany

### Technical data

	Unit	Value
Thickness	mm	0.4
Total mass	kg	0.3

### Market

Germany

## LCA: Calculation rules

### Functional unit

1 m<sup>2</sup>

### Reference service life

30 years

### Data quality

The foreground data are based on extensive and detailed data collection at the production site of the manufacturer, covering key processes such as raw material sourcing, formulation, and manufacturing. These foreground data are fully linked with corresponding datasets from the background database (Eurobitume, ecoinvent 3.10) or with EN15804+A2-compliant EPDs, ensuring consistency, reliability, and maintaining alignment with the latest industry standards.

The overall data representativeness is rated as good with an overall score of 4.08/5, in accordance with EN 15804+A2 Annex E guidance on data quality assessment, considering geographical, technical, and temporal representativeness.

### System boundaries (X=included, MND=module not declared)

	Production			Installation		Use stage							End-of-Life				Next product system
	Raw material supply	Transport	Manufacturing	Transport	Installation Process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational Energy Use	Operational Water Use	Demolition	Transport	Waste Processing	Disposal	Benefits and loads beyond the system boundary
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	x	x	x	x	x	MND	MND	MND	MND	MND	MND	MND	x	x	x	x	x
Geography			DE	DE	DE	MND	MND	MND	MND	MND	MND	MND	DE	DE	DE	DE	DE

For the geographies modeled in A1 and A2, refer to *Product specification*.

Type of EPD: Cradle to gate with options A4, A5, C1, C2, C3, C4 and D

#### Stage of Material Production and Construction

Module A1: Extraction and processing of bituminous raw materials

Module A2: Transportation of raw material to the manufacturing plant

Module A3: Bituminous waterproofing membrane production at the plant and waste treatment

Module A4: Transportation to the construction site

Module A5: Includes all processes associated with product installation, as well as the production, transportation, and treatment of unused bitumen waterproofing membrane. Includes therefore all additional material due to material overlap which is considered as installation loss.

#### Disposal Stage

Module C1: Demolition/Dismantling of the waterproofing layer

Module C2: Transportation of mixed roofing material waste for processing

Module C3: Incineration of bitumen

Module C4: Final disposal of bitumen waste in sanitary landfill

#### Credits and burdens outside the system boundaries

Module D: Credits and burdens for the use of bitumen waste as a secondary fuel or thermal/electrical energy generation

### Cut-off criteria

No cut-offs were applied.

## **Allocation**

Elementary flows (energy and fuels, ancillary materials and waste) data was collected on production-process-level. Using the total output of the production process in 2024, elementary flows are assigned to 1 declared unit based on mass.

## LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transport to the building site (A4)	Value	Unit
Transported mass	0.66	kg
Truck: Distance	650.00	km
Truck: Energy demand	1.58	MJ / t*km
Truck: Activity	transport, freight, lorry >32 metric ton, EURO6	-
Truck: Capacity utilization	53.30	%

Installation into the building (A5)	Value	Unit
Treatment of Cardboard waste	Incineration	
Treatment of Wooden pallets waste	Reuse	
Treatment of Plastic film waste	Recycling	
Welding method	Hot air welding	-
Installation method	Glued, contact adhesive, one layer	-
Additional material due to overlap	12.00	%
Electricity	0.01	kWh
Contact adhesive	0.40	kg

The resource consumption in A5 depends on the welding method and the installation method, according to EN 17388.

Transport to the waste facility (C2)	Value	Unit
Mass to recycling	0.03	kg
Mass to landfill	0.14	kg
Mass to incineration	0.14	kg
Distance to landfill by truck	50.00	km
Distance to incineration by truck	50.00	km
Distance to recycling by truck	50.00	km
Truck: Activity	transport, freight, lorry >32 metric ton, EURO6	-
Truck: Capacity utilization	53.30	%
Truck: Distance	50.00	km
Truck: Energy demand	1.58	MJ / t*km

Transportation distances are based on JRC Technical Report, Model for Life Cycle Assessment (LCA) of buildings' (2018).

Waste processing (C3)	Value	Unit
Material for incineration	0.14	kg
Material for recycling	0.03	kg

Disposal (C4)	Value	Unit
Material for landfill	0.14	kg

Reuse, recovery and/or recycling potentials (D)	Value	Unit
Amount of secondary material that the system takes in	0	kg
Substitution of rubber	0.03	kg
Exported electrical energy	0.49	MJ
Exported thermal energy	0.97	MJ

Calculation of benefits and loads per EN 15804+A2.

## LCA: Results

### Core environmental impact indicators

Indicator	Unit	A1-3	A4	A5	C1	C2	C3	C4	D
GWP-total	kg CO <sub>2</sub> -eq.	1.25e+00	4.46e-02	1.35e+00	0	1.55e-03	4.31e-01	1.25e-02	-2.20e-01
GWP-fossil	kg CO <sub>2</sub> -eq.	1.24e+00	4.46e-02	1.31e+00	0	1.55e-03	4.31e-01	1.24e-02	-2.14e-01
GWP-biogenic	kg CO <sub>2</sub> -eq.	1.06e-02	2.24e-05	3.43e-02	0	7.79e-07	4.99e-05	1.45e-05	-5.64e-03
GWP-luluc	kg CO <sub>2</sub> -eq.	2.57e-03	1.58e-05	1.26e-03	0	5.52e-07	4.49e-06	2.71e-07	-1.92e-04
ODP	kg CFC-11-Eq	5.48e-07	9.29e-10	1.04e-07	0	3.24e-11	1.42e-10	4.53e-11	-6.74e-09
AP	mol H <sup>+</sup> -Eq	5.24e-03	1.05e-04	5.45e-03	0	3.67e-06	6.69e-05	9.31e-06	-5.25e-04
EP-freshwater	kg P-Eq	2.57e-04	3.14e-06	3.62e-04	0	1.09e-07	1.62e-06	9.33e-08	-1.03e-04
EP-marine	kg N-Eq	1.02e-03	2.76e-05	9.46e-04	0	9.62e-07	2.85e-05	2.82e-04	-1.15e-04
EP-terrestrial	mol N-Eq	1.04e-02	2.99e-04	9.80e-03	0	1.04e-05	2.80e-04	4.12e-05	-1.09e-03
POCP	kg NMVOC-Eq	1.04e-02	1.83e-04	7.82e-03	0	6.37e-06	7.37e-05	1.86e-05	-7.11e-04
ADPE	kg Sb-Eq	2.21e-05	1.27e-07	2.02e-05	0	4.44e-09	4.57e-08	3.08e-09	-1.45e-06
ADPF	MJ, net calorific value	3.84e+01	6.69e-01	3.69e+01	0	2.33e-02	7.72e-02	3.18e-02	-4.52e+00
WDP	m <sup>3</sup> world Eq deprived	3.16e-01	3.36e-03	7.66e-01	0	1.17e-04	2.29e-02	2.23e-04	-6.75e-02

**GWP-total:** Global Warming Potential - total **GWP-fossil:** Global warming potential - fossil **GWP-biogenic:** Global Warming Potential - biogenic **GWP-luluc:** Global Warming Potential - luluc **ODP:** Depletion potential of the stratospheric ozone layer **AP:** Acidification potential, Accumulated Exceedance **EP-freshwater:** Eutrophication potential - freshwater **EP-marine:** Eutrophication potential - marine **EP-terrestrial:** Eutrophication potential - terrestrial **POCP:** Photochemical Ozone Creation Potential **ADPE:** Abiotic depletion potential - non-fossil resources **ADPF:** Abiotic depletion potential - fossil resources **WDP:** Water (user) deprivation potential

### Additional indicators

Indicator	Unit	A1-3	A4	A5	C1	C2	C3	C4	D
PM	disease incidence	6.73e-08	4.34e-09	8.25e-08	0	1.51e-10	4.28e-10	2.19e-10	-6.33e-09
IRP	kBq U235-Eq	8.70e-02	8.13e-04	1.53e-01	0	2.83e-05	3.69e-04	5.29e-05	-2.50e-02
ETP-fw	CTUe	1.13e+01	1.59e-01	9.96e+00	0	5.53e-03	7.49e-01	3.96e-02	-8.70e-01
HTP-c	CTUh	4.61e-09	2.85e-10	5.27e-09	0	9.94e-12	1.05e-10	8.41e-12	-5.06e-10
HTP-nc	CTUh	1.86e-08	4.41e-10	1.39e-08	0	1.54e-11	1.66e-10	7.53e-11	-1.33e-09
SQP	dimensionless	4.27e+00	6.73e-01	5.87e+00	0	2.35e-02	4.91e-02	7.69e-02	-5.33e-01

**PM:** Potential incidence of disease due to PM emissions **IRP:** Potential Human exposure efficiency relative to U235 **ETP-fw:** Potential Comparative Toxic Unit for ecosystems **HTP-c:** Potential Comparative Toxic Unit for humans - cancer effects **HTP-nc:** Potential Comparative Toxic Unit for humans - non-cancer effects **SQP:** Potential Soil quality index

**IRP:** This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.



**ETP-fw, HTP-c, HTP-nc and SQP:** The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experienced with these indicators.

## Use of resources

Indicator	Unit	A1-3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	1.02e+00	1.06e-02	1.82e+00	0	3.70e-04	5.50e-03	9.81e-04	-3.50e-01
PERM	MJ	1.98e-01	0	-1.74e-01	0	0	0	0	0
PERT	MJ	1.22e+00	1.06e-02	1.65e+00	0	3.70e-04	5.50e-03	9.81e-04	-3.50e-01
PENRE	MJ	2.83e+01	6.69e-01	2.51e+01	0	2.33e-02	7.72e-02	3.18e-02	-3.70e+00
PENRM	MJ	1.01e+01	0	1.17e+01	0	0	-5.52e+00	0	-8.20e-01
PENRT	MJ	3.84e+01	6.69e-01	3.68e+01	0	2.33e-02	-5.44e+00	3.18e-02	-4.52e+00
SM	kg	0	0	0	0	0	0	0	3.07e-02
RSF	MJ	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0
FW	m <sup>3</sup>	8.57e-03	9.73e-05	1.95e-02	0	3.39e-06	4.20e-04	-6.07e-04	-1.82e-03

**PERE:** Primary energy resources - renewable: use as energy carrier **PERM:** Primary energy resources - renewable: used as raw materials **PERT:** Primary energy resources - renewable: total **PENRE:** Primary energy resources - non-renewable: use as energy carrier **PENRM:** Primary energy resources - non-renewable: used as raw materials **PENRT:** Primary energy resources - non-renewable: total **SM:** Use of secondary material **RSF:** Renewable secondary fuels **NRSF:** Non-renewable secondary fuels **FW:** Net use of fresh water

## Waste flows

Indicator	Unit	A1-3	A4	A5	C1	C2	C3	C4	D
HWD	kg	6.48e-02	9.73e-04	6.55e-02	0	3.39e-05	1.35e-02	4.72e-05	-6.66e-03
NHWD	kg	1.74e+00	1.95e-02	3.16e+00	0	6.79e-04	1.64e-01	7.80e-01	-6.18e-01
RWD	kg	3.19e-05	2.01e-07	4.03e-05	0	7.01e-09	9.59e-08	1.23e-08	-6.94e-06

**HWD:** Hazardous waste disposed **NHWD:** Non hazardous waste disposed **RWD:** Radioactive waste disposed

## Output flows

Indicator	Unit	A1-3	A4	A5	C1	C2	C3	C4	D
CRU	kg	0	0	3.50e-01	0	0	0	0	0
MFR	kg	7.88e-04	0	7.50e-04	0	0	3.00e-02	0	0
MER	kg	0	0	0	0	0	0	0	0
EEE	MJ	2.34e-02	0	2.58e-02	0	0	4.39e-01	0	0
EET	MJ	5.60e-02	0	5.28e-02	0	0	8.59e-01	0	0

**CRU:** Components for re-use **MFR:** Materials for recycling **MER:** Materials for energy recovery **EEE:** Exported electrical energy **EET:** Exported thermal energy

Name	Value	Unit
Biogenic carbon content in product	0	kg C
Biogenic carbon content in accompanying packaging	6.37e-03	kg C

## Additional requirements

### Greenhouse gas emissions from the use of electricity in the manufacturing phase

Electricity consumption in the manufacturing phase is composed from the sources below certified by Guarantee of Origin. Electricity is represented by data in ecoinvent 3.10 regionalised for Germany.

Electricity	Unit	Value
Nuclear	kg CO <sub>2</sub> -eq. / kWh	6.56e-03
Hydro	kg CO <sub>2</sub> -eq. / kWh	0.72
Gas	kg CO <sub>2</sub> -eq. / kWh	0.76
Oil	kg CO <sub>2</sub> -eq. / kWh	0.95
Coal and peat	kg CO <sub>2</sub> -eq. / kWh	1.05

### Dangerous substances

The product contains no hazardous substances given by the REACH Candidate List or the Norwegian Priority List.

## Additional environmental information

### Additional environmental impact indicators required in NPCR Part A for construction products

Indicator	Unit	A1-3	A4	A5	C1	C2	C3	C4	D
GWP-IOBC	kg CO <sub>2</sub> -eq.	ND	4.46e-02	ND	0	1.55e-03	4.31e-01	1.24e-02	-2.15e-01

**GWP-IOBC:** Global Warming Potential - Instantaneous oxidation of biogenic carbon

## Bibliography

DIN EN ISO 14025:2011-10	Environmental labels and declarations - Type III environmental declarations - Principles and procedures
DIN EN ISO 14040:2021-02	Environmental management - Life cycle assessment - Principles and framework
DIN EN ISO 14044:2021-02	Environmental management - Life cycle assessment - Requirements and guidelines
EN 15804:2012+A2:2019	Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products
DIN CENTR 15941:2010-11	Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data
DIN EN 15942:2022-04	Sustainability of construction works - Environmental product declarations - Communication format business-to-business
ISO 21930:2017-07	Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products and services
ecoinvent v3.10	ecoinvent, Zurich, Switzerland, database version 3.10
Eurobitume. (2025). Life Cycle Assessment 4.0 for bitumen. Brussels	European Bitumen Association (Eurobitume). Retrieved from <a href="https://eurobitume.eu/wp-content/uploads/2025/03/EB-LCA-4.0-2025.pdf">https://eurobitume.eu/wp-content/uploads/2025/03/EB-LCA-4.0-2025.pdf</a>
PCR	NPCR 022 Part B for roof waterproofing (v2)
EN 17388	Abdichtungsbahnen - Umweltproduktdeklaration - Produkt-Kategorie-Regeln für Bitumenbahnen mit Trägereinlage, Kunststoff- und Elastomerbahnen für Dachabdichtungen
EN 13956 Flexible sheets for waterproofing	Plastic and rubber sheets for roof waterproofing - Definitions and characteristics
EN 13707 Flexible sheets for waterproofing	Reinforced bitumen sheets for roof waterproofing - Definitions and characteristics
EN 544 Bitumen shingles with mineral and/or synthetic reinforcements	Product specification and test methods
	Basic principles and recommendations for describing the dismantling, post use, and disposal stage of construction products: <a href="https://www.umweltbundesamt.de/sites/default/files/medien/1410/publikationen/2020-07-06_texte_130-2020_guidance-document-construction-industry.pdf">https://www.umweltbundesamt.de/sites/default/files/medien/1410/publikationen/2020-07-06_texte_130-2020_guidance-document-construction-industry.pdf</a>
	ILCD Handbook: <a href="https://epica.jrc.ec.europa.eu/uploads/ILCD-Handbook-LCIA-Background-analysis-online-12March2010.pdf">https://epica.jrc.ec.europa.eu/uploads/ILCD-Handbook-LCIA-Background-analysis-online-12March2010.pdf</a>

 Global Program Operator	<b>Program Operator</b>	Phone	+47 23 08 80 00
	EPD Norway Majorstuen P.O. Box 5250, N-0303 Oslo Norway	Email	post@epd-norge.no
		Web	www.epd-norge.no
 Global Program Operator	<b>Publisher</b>	Phone	+47 23 08 80 00
	The Norwegian EPD Foundation Post Box 5250 Majorstuen, 0303 Oslo Norway	Email	post@epd-norge.no
		Web	www.epd-norge.no
	<b>Owner of the declaration</b>	Phone	01755837403
	Carlisle Construction Materials GmbH Gothaer Straße 44, 99880 Waltershausen Germany	Email	andreas.koellner@ccm-europe.com
		Web	<a href="#">none</a>
	<b>Author of the life cycle assesment</b>	Phone	01755837403
	Carlisle Construction Materials GmbH Gothaer Straße 44, 99880 Waltershausen Germany	Email	andreas.koellner@ccm-europe.com
		Web	<a href="#">none</a>
	ECO Platform ECO Portal	Web	<a href="http://www.eco-platform.org">www.eco-platform.org</a>
		Web	<a href="#">ECO Portal</a>
	<b>Developer of EPD generator</b>	Phone	+49 176 56 96 77 91
	Emidat GmbH Sandstraße 33, 80335 München Germany	Email	epd@emidat.com
		Web	www.emidat.com