

Fast renovation

Creation 70 Connect

The Reference in Tiles & Planks

Gerflor®

Creation 70 Connect



Osb Natural 0091



Oak Light 0090



Oak Golden 1492



Masking effect ++

Masking effect +



Oak Golden


Creation 70 Connect



Recyclable
through Gerflor's Second Life Program
via le Programme Seconde Vie
Average recycled content: 30%
Contenu recyclé moyen : 30%



Adhesive Free
Pas de colle




3X more resistant
3X plus résistant
VS competition / VS concurrence



Rolling traffic compliant*
Compatible
trafic roulant*



All over effect
Décor avec effet continu

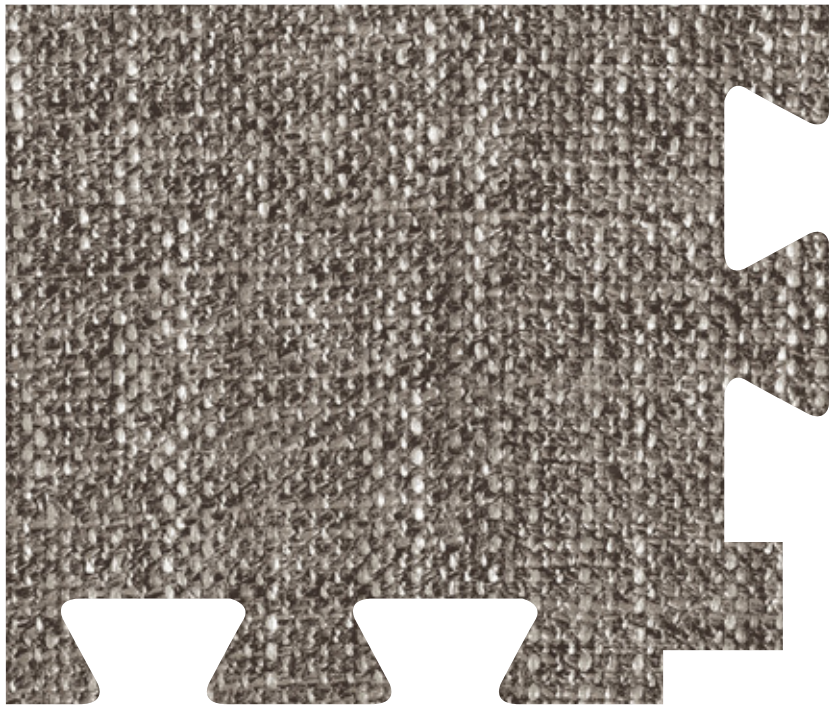

Installation Guidelines on [gerflor.com](https://www.gerflor.com) / Principe de mise en œuvre sur [gerflor.fr](https://www.gerflor.fr)
*Available conditions in Technical Datasheet. / Conditions disponibles sur fiche technique.



Gentleman Taupe - Dalma Grey



Entrance mats / Tapis d'entrée
Kit Romat GT 1719
1500x1000 mm



Aluminium Profile 0505
(Corner 1513)




Anti Bounce Mallet /
Mallet anti-rebond 5951




Oak Light / Rough Textile Beige



Rough Textile Beige 0062

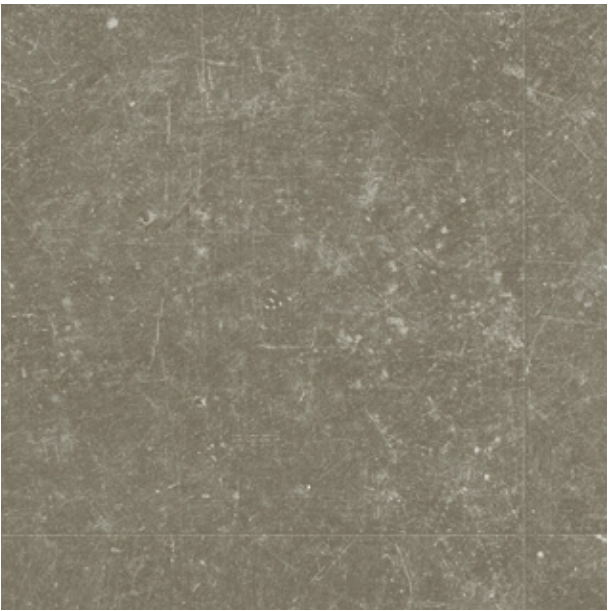


Dock Taupe 0087

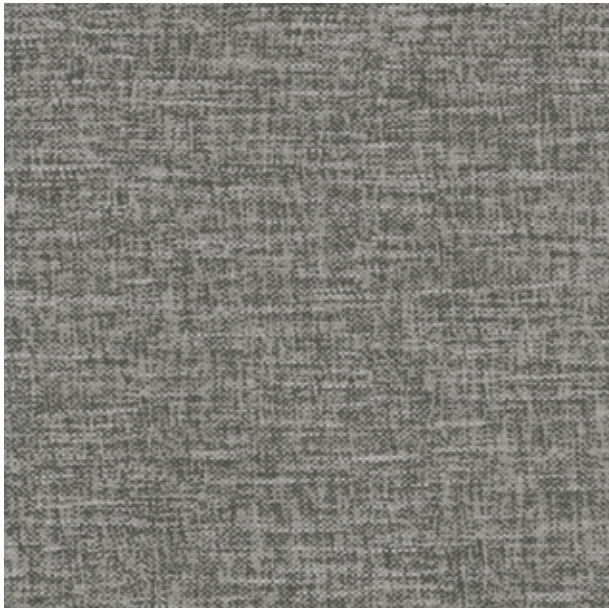


Gentleman Taupe 0089




Rough Textile Grey 0063

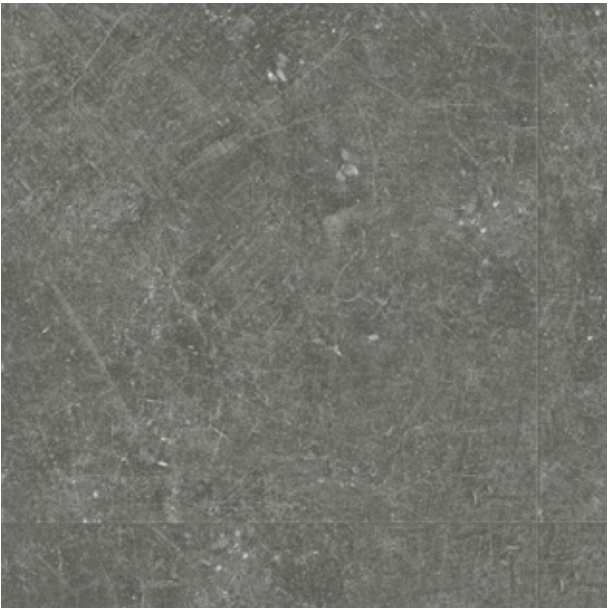


Dock Grey 0085

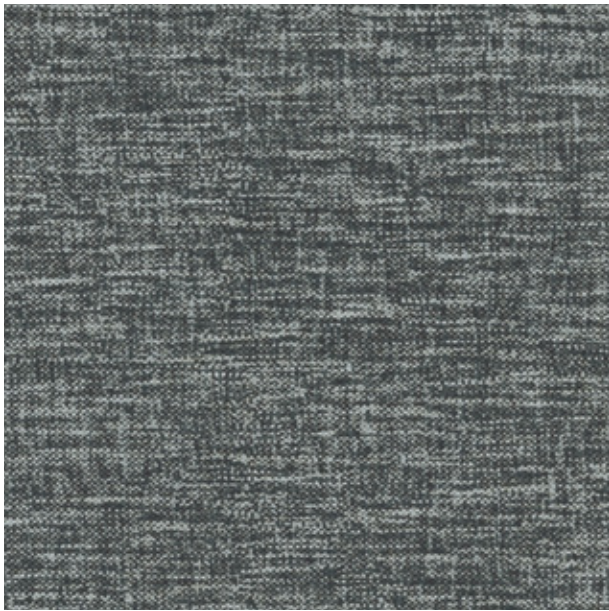

Gentleman Grey 0088

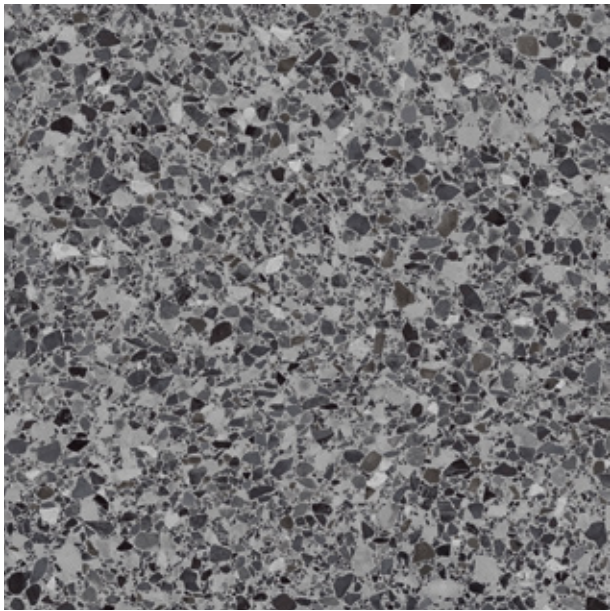

Dalma Grey 1088

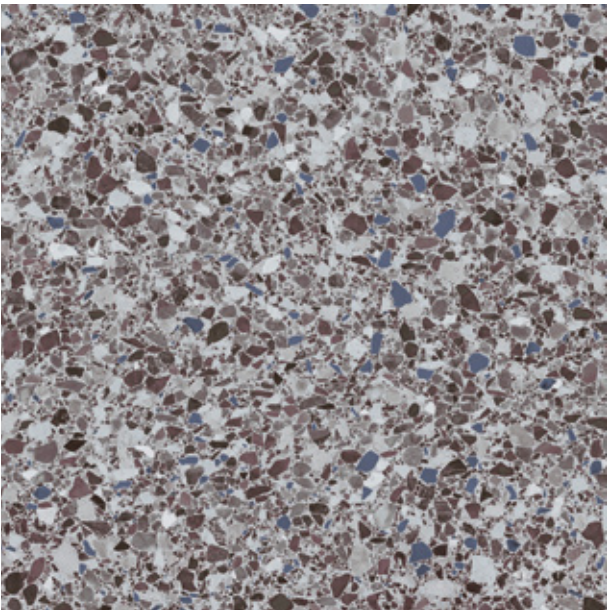

Dalma Burgundy 1089



Dock Taupe



* Information sur le niveau d'émission de substances volatiles dans l'air intérieur, présentant un risque de toxicité par inhalation, sur une échelle de classe allant de A+ (très faibles émissions) à C (fortes émissions)

Creation 70 Connect			
Description / Beschreibung / Beschrijving / Descripción / Descrĩa0 / Descrizione / Beskrivning / Beskrivelse			
Épaisseur totale / Total Thickness / Gesamtdicke / Totale dikte / Espesor total / Espessura total / Spessore totale / Total tjocklek / Total tykkelse	EN ISO 24346	mm	5.00
	ASTM F386	inch	0.20
Épaisseur couche d'usure / Thickness of the wearlayer / Dicke der Nuttschicht / Dikte van de slijtlaag / Espesor capa de uso / Espessura camada de desgaste / Spessore strato di usura / Slietskikt tjocklek / Tykkelse sliresjikt	EN ISO 24340	mm	0.70
	ASTM F410	inch	0.03
Poids / Weight / Flächengewicht / Gewicht / Peso / Peso / Peso / Vikt / Vekt	EN ISO 23997	g/m²	8235
	EN ISO 24342	mm	701.3 × 701.3
	ASTM F 536	inch	27.6" x 27.6"
Format / Size / Format / Afmetingen / Dimensiones / Dimensões / Dimensione / Storlek / Størrelse			
Nombre de dalles par boîte / Number of tiles per package / Cantidad de losetas / Caja	-	-	100 / 49.14 m²
Sans phtalates / Phthalate free / Phthalatfrei / Sin ftalatos / Sem ftalatos / Senza ftalati	-	-	OK
Classification / Klassifikation / Classificatie / Clasificaciones / Classificações / Classificazioni / Klassificering / Klassifisering			
Spécification produit / Norm / Product Specification / Produktnorm / Technische eigenschappen / Norme / Normas / Normas / Norma prodotto / Norm/Produktspecifikation / Norm	-	-	EN ISO 10582
	ASTM F 1700	-	Class III Type B
Classement européen / European Classification / Europäische Klassifizierung / Europese classificatie / Clasificación europea / Classificação Europeia / Europea / Europaklass / Europaklasse	EN ISO 10874	Class	34 - 43
Locaux UPEC	-	Classement	Locaux U4P3E1/2C2
Avis technique	-	n° AT.	12/20-1793_V1
Sonorité à la marche / Room Impact / Gehschall	NFS 31 074	dB	75
Classement Feu / Fire Rating / Brandverhalten / Brand classificatie / Fuego / Fogo / Reazione al fuoco / Brandklassificering / Brannklassifisering	EN 13 501-1	Class	Bfl-s1
Potentiel de charge / Static Electrical Propensity / Begehauladung / Elektrische eigenschappen / Comportamiento electrostático / Comportamento electrostático / Resistenza elettrica / Elektrisk oppladning / Elektrostatisk oppladning	EN 1815	kV	< 2
Glissance humide / Slip Resistance Wet / Rutschhemmung / Anti-slip / Deslizamiento húmedo / Escorregamento húmido / Scivolosità umida / Friktion / Friksjon, våt	EN 16165:2021 Appendix B (DIN 51130)	Class	R10 ⁽¹⁾
Performances / Technische Eigenschaften / Testresultaat / Cualidades Técnicas / Caratteristiche Tecniche / Testvärden / Testverdiier			
Résistance à l'usure / Wear Resistance / Verschleißverhalten / Slijtvastheid / Abrasión / Abrasão / Resistenza all'abrasione / Slitagemotstånd / Slitestyrke	EN 660.2	mm³	≤ 2.0
Groupe d'abrasion / Wear Group / Verschleißgruppe / Groep slijtvasheid / Grupo de abrasión / Grupo de abrasão / Gruppo di abrasione / Slitklass / Slitasjegruppe	-	group	T
Teneur en agent liant / Type Binder content	EN ISO 10582	group	I
Stabilité dimensionnelle / Dimensional Stability / Maßstabilität / Maatvastheid / Estabilidad dimensional / Estabilidade dimensional / Stabilità dimensionale / Dimensionsstabilitet / Dimensjonsstabilitet	EN ISO 23999	%	≤ 0.15
Poinçonnement statique rémanent / Residual Indentation / Resteindruck / Indrukbelasting / Punzonamiento / Punçoamento / Impronta / Intrycksbeständighet / Intrykksfasthet	EN ISO 24343-1	mm	≤ 0.10
Essai de la chaise à roulettes / Castor chair test / Stuhlrollenbeanspruchung / Rolweerstand bureaustoelen / Determinación del efecto de una silla con ruedas / Resistência a cadeiras de rodas / Resistenza al passaggio di sed / Tålgighet mot rullande stolshjul / Rullende stolshjul (Type H)	ISO 4918	-	OK
Isolation acoustique bruits de chocs / Impact sound insulation / Trittschallverbesserungsmaß / Geluidsisolatie / Acústica / Isolamento acústico / Stegljuddämpning / Trinnlydsdemping	EN ISO 717-2	dB	5
Conductivité thermique / Thermal Conductivity / Wärmeleitfähigkeit / Thermische weerstand / Conductividad térmica / Contutividade térmica / Resistencia térmica / Värmeledningsmotstånd / Varmemotstand	EN ISO 10456	W/(m.K)	0.25
Solidité lumière / Colour Fastness / Lichtechtheit / Lichtechtheid / Resistencia a la luz / Estabilidade das cores / Solidità alla luce / Färgbeständighet / Fargebestandighet	EN ISO 105 - B02	degree	≥ 6
Traitement de surface / Surface Treatment / Oberflächenvergütung / Oppervlaktebehandling / Tratamiento de superficie / Tratamento de superficie / Trattamento di superficie / Ytbehandling / Overflatebehandling	-	-	PUR+ Matt
Résistance aux produits chimiques / Chemical Products Resistance / Verhalten gegenüber Chemikalien / Chemische bestendigheid / Resistencia a los productos químicos / Resistência aos produtos químicos / Resistenza ai prodotti chimici / Kemikaliebeständighet / Kjemikaliebestandighet	EN ISO 26987	-	OK
Environnement / Umwelt / Medio ambiente / Ambiente / Ambiente			
Contenu recyclé moyen / Average recycled content	-	%	30
Recyclabilité (Programme seconde vie Gerflor) / Recyclability (Through Gerflor second life program)	-	-	OK
EPD / FDES	-	-	Available / Disponible
Santé / Health / Gesundheit / Salud / Saúde / Salute			
TVOC après 28 jours / TVOC after 28 days / TVOC (28 Tage) / TVOC (28 dagen) / TVOC (28 dias) / TVOC (28 dias) / TVOC (28 giorni) / TVOC (28 dagar) / TVOC (28 dager)	ISO 16000-6	micrograms/m³	< 10
Certification / Zertifikat / Certificado / Certificação / Certifikat / Sertifisering	-	-	Floorscore®
Marquage CE / CE Marking / CE Kennzeichnung / Eg_conformiteitsmerk / Marca De Conformidad CE / Marca De Conformidade CE / Marcatura CE Di Conformita / CE-Märkning / CE Marking			
CE	EN 14041	-	

(1) Plan incliné avec huile / Ramp test with oil / Schiefe Ebene

IMPORTANT: The information contained in this document is valid from 07/01/2026 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

IMPORTANT : Les informations contenues dans ce document sont valables à compter du : 01/07/2026 et susceptibles d'être modifiées à tout moment et sans préavis. L'évolution de la technique étant permanente, il appartient à notre clientèle avant toute mise en œuvre, de vérifier auprès de nos services que le présent document est bien celui en vigueur.

we care / we act our commitments for 2030

climate

-30% CO₂
scopes 1, 2, 3
in tons eq. CO₂, vs 2019
Science Based Targets⁽¹⁾

resources

75%
biobased, mineral
& recycled⁽²⁾

30%
recycled content⁽³⁾

circularity

65 000
tons of waste treated⁽⁴⁾

45%
looselay⁽⁵⁾

health & well-being

100%
of our products perform
better than Indoor Air Quality
standards⁽⁶⁾

95%
sales covered by EPD⁽⁷⁾

people

30%
women⁽⁸⁾

40%
internal mobility⁽⁹⁾

Towards 0
accident⁽¹⁰⁾

More details: 1. Scopes 1, 2 & 3, in absolute value, market-based. Trajectory approved by SBTi (Science Based Targets Initiative). 2. Proportion of raw materials used in floors and walls that do not contribute to resource depletion: bio-based, mineral and recycled materials. Includes salt used in the synthesis of PVC. 3. Average proportion of recycled material in Gerflor's flooring and wall coverings. 4. Volume of scraps processed at our recycling plant. 5. Proportion of turnover generated by looselay floor coverings that are easy to remove and/or reuse. 6. Proportion of floor and wall products with a TVOC concentration of less than 100 µg/m³ over a 28 days period. 7. Proportion of flooring and wall covering sales in Europe covered by FDES or EPDs. 8. Proportion of women in the workforce and among managers. 9. Proportion of positions filled through internal mobility. 10. Number of work-related accident, including temporary workers. Target on accident frequency rate (number of work-related accident per millions hour worked) <3.

