

NuClick® 2.0 Colours



Dual-Function: Roof & Photovoltaics
Designed and Developed in Europe
Quality assured through third-party testing
16 kg/m² - 30% less than common system
Engineered for High Snow Load
Tier 1 TOPCon cells



Click-Seam: Fast Installation, Trusted
for over 25 Years
Photonic Pigment - Consistent Color at
All Angles



Certificates

IEC 61215:2021 (PV Module Reliability)

IEC 61730:2023 (PV Module Safety)

MCS 005 (Product certification for UK market)

MCS 010 (Production control for UK market)

EN 13501-5:2016 (Fire safety)

Roof (t1) by GTC

Roof (t2) by Eurofins Expert Services Oy



reddot winner 2025
sustainable design

2025 WINNER
**EUROPEAN
PRODUCT
DESIGN
AWARD**



NuClick 2.0 Terracotta

Module name: **C-2x12/88**

Specification: BT/0.6/SAT/8004



Contact

Roofit Solar Energy OÜ
Härgmäe 21, Tallinn 13525, Estonia
<http://roofit.solar>
info@roofit.solar

Working Conditions

Maximum System Voltage	1000 V DC
Ambient Temperature	-40 °C ... +40 °C
Maximum Series Fuse Rating	25A
Safety Class	Class II
Tested Positive Load	10 000 Pa = 1020 kg/m ²
Tested Negative Load	2400 Pa
Impact Resistance	Hailstone up to 25 mm in size
Minimum Roof Slope	10 degrees


Mechanical Specifications

Cells	210 mm monocrystalline TOPCon 2x12 configuration
Encapsulant	POE
Front glass	3.2 mm tempered low-iron glass Gloss level 70 GU
Roofing material	0.6 mm steel S280GD 275 g/m ² zinc-galvanized 50 µm Greencoat Pural BT Satin RR750 Gloss level 20 GU
Junction boxes	2 bypass diodes, IP68, potted
Connectors	Stäubli MC4-Evo 2
Cables	4 mm ² H1Z2Z2-K solar cable length 500 mm
Effective roof coverage	1409 mm x 475 mm
Mounting method	Ruukki Classic
Weight	11.0 kg (pc) = 16.4 kg/m ² (installed)

Packing

Packing Configuration	34 modules per pallet
Pallet (LxWxH)	1690 x 1105 x 840 mm
Pallet weight	475 kg

Product dimensions (units in mm)
General tolerance: ±1 mm

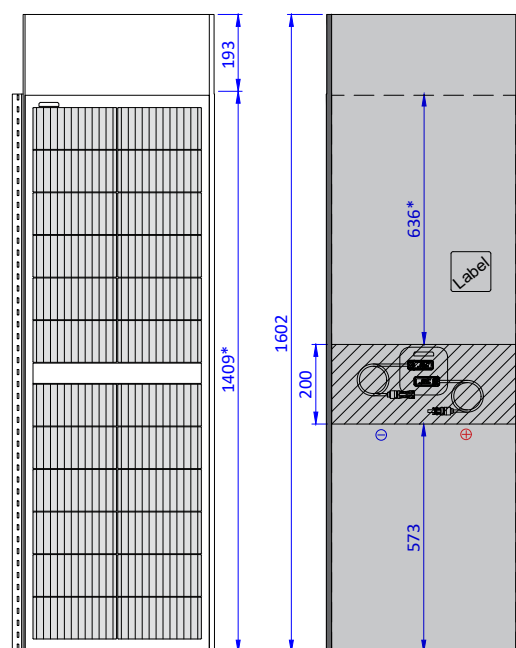

☐ No batten zone

*Gap of 10mm between 2 modules included



Electrical Characteristics

* Standard Test Conditions (irradiance 1000 W/m ² , cell temperature 25 °C, spectrum AM1.5)		STC*
Nominal Power	P _{mpp} (W)	88
Open Circuit Voltage	V _{oc} (V)	17.6
Short Circuit Current	I _{sc} (A)	6.1
MPP Voltage	V _{mpp} (V)	15.1
MPP Current	I _{mpp} (A)	5.8
Module efficiency	η (%)	13.6

Power Tolerances ±3 %

Current and Voltage Tolerances ±3 %

Thermal Characteristics

Temperature Coefficient of	P _{mpp}	-0.334 % /K
Temperature Coefficient of	V _{oc}	-0.259 % /K
Temperature Coefficient of	I _{sc}	0.049 % /K

NuClick 2.0 Pale Green

Module name: **C-2x12/96**

Specification: BT/0.6/SAT/6021



Contact

Roofit Solar Energy OÜ
Härgmäe 21, Tallinn 13525, Estonia
<http://roofit.solar>
info@roofit.solar

Working Conditions

Maximum System Voltage	1000 V DC
Ambient Temperature	-40 °C ... +40 °C
Maximum Series Fuse Rating	25A
Safety Class	Class II
Tested Positive Load	10 000 Pa = 1020 kg/m ²
Tested Negative Load	2400 Pa
Impact Resistance	Hailstone up to 25 mm in size
Minimum Roof Slope	10 degrees


Mechanical Specifications

Cells	210 mm monocrystalline TOPCon 2x12 configuration
Encapsulant	POE
Front glass	3.2 mm tempered low-iron glass Gloss level 70 GU
Roofing material	0.6 mm steel S280GD 275 g/m ² zinc-galvanized 50 µm Greencoat Pural BT Satin RR36 Gloss level 20 GU
Junction boxes	2 bypass diodes, IP68, potted
Connectors	Stäubli MC4-Evo 2
Cables	4 mm ² H1Z2Z2-K solar cable length 500 mm
Effective roof coverage	1409 mm x 475 mm
Mounting method	Ruukki Classic
Weight	11.0 kg (pc) = 16.4 kg/m ² (installed)

Packing

Packing Configuration	34 modules per pallet
Pallet (LxWxH)	1690 x 1105 x 840 mm
Pallet weight	475 kg

Product dimensions (units in mm)
General tolerance: ±1mm

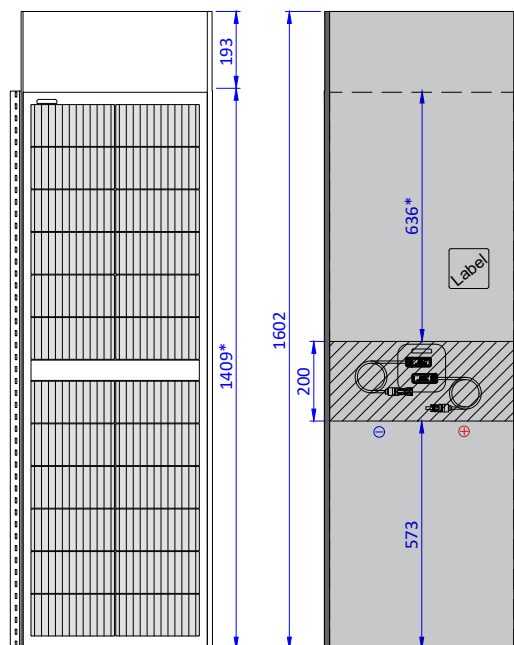

☐ No batten zone

*Gap of 10mm between 2 modules included



Electrical Characteristics

Standard Test Conditions (irradiance 1000 W/m ² , cell temperature 25 °C, spectrum AM1.5)		STC
Nominal Power	P _{mpp} (W)	96
MPP Voltage	V _{mpp} (V)	15.0
MPP Current	I _{mpp} (A)	6.4
Open Circuit Voltage	V _{oc} (V)	17.6
Short Circuit Current	I _{sc} (A)	6.6
Module efficiency	η (%)	14.8

Power Tolerances ±3 %
Current and Voltage Tolerances ±3 %

Thermal Characteristics

Temperature Coefficient of	P _{mpp}	-0.334 % /K
Temperature Coefficient of	V _{oc}	-0.259 % /K
Temperature Coefficient of	I _{sc}	0.049 % /K

NuClick 2.0 Iron Grey

Module name: **C-2x12/114**

Specification: BT/0.6/SAT/7011



Contact

Roofit Solar Energy OÜ
Härgmäe 21, Tallinn 13525, Estonia
<http://roofit.solar>
info@roofit.solar

Working Conditions

Maximum System Voltage	1000 V DC
Ambient Temperature	-40 °C ... +40 °C
Maximum Series Fuse Rating	25A
Safety Class	Class II
Tested Positive Load	10 000 Pa = 1020 kg/m ²
Tested Negative Load	2400 Pa
Impact Resistance	Hailstone up to 25 mm in size
Minimum Roof Slope	10 degrees


Mechanical Specifications

Cells	210 mm monocrystalline TOPCon 2x12 configuration
Encapsulant	POE
Front glass	3.2 mm tempered low-iron glass Gloss level 70 GU
Roofing material	0.6 mm steel S280GD 275 g/m ² zinc-galvanized 50 µm Greencoat Pural BT Satin RR23 Gloss level 20 GU
Junction boxes	2 bypass diodes, IP68, potted
Connectors	Stäubli MC4-Evo 2
Cables	4 mm ² H1Z2Z2-K solar cable length 500 mm
Effective roof coverage	1409 mm x 475 mm
Mounting method	Ruukki Classic
Weight	11.0 kg (pc) = 16.4 kg/m ² (installed)

Packing

Packing Configuration	34 modules per pallet
Pallet (LxWxH)	1690 x 1105 x 840 mm
Pallet weight	475 kg

Product dimensions (units in mm)
General tolerance: ±1mm

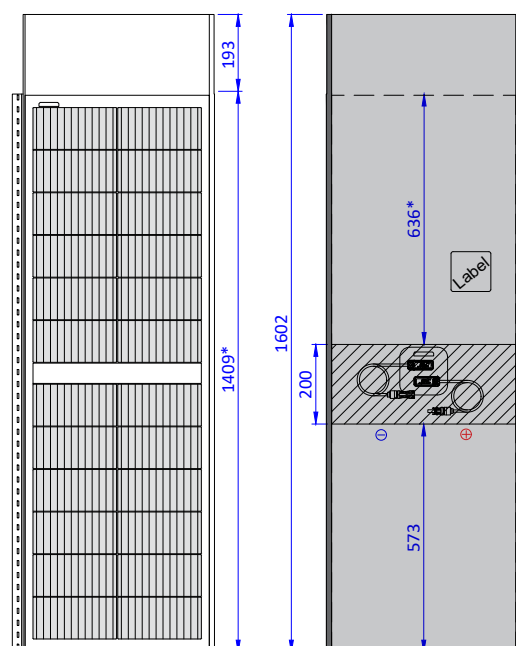

▨ No batten zone

*Gap of 10mm between 2 modules included



Electrical Characteristics

Standard Test Conditions (irradiance 1000 W/m ² , cell temperature 25 °C, spectrum AM1.5)		STC
Nominal Power	P _{mpp} (W)	114
MPP Voltage	V _{mpp} (V)	15.0
MPP Current	I _{mpp} (A)	7.6
Open Circuit Voltage	V _{oc} (V)	17.6
Short Circuit Current	I _{sc} (A)	8.0
Module efficiency	η (%)	17.6

Power Tolerances ±3 %
Current and Voltage Tolerances ±3 %

Thermal Characteristics

Temperature Coefficient of	P _{mpp}	-0.334 % /K
Temperature Coefficient of	V _{oc}	-0.259 % /K
Temperature Coefficient of	I _{sc}	0.049 % /K