

## ENVIRONMENTAL PRODUCT DECLARATION

**TPS, TPD-L, BFP-035,  
SDP-035-GF, SDP-035,  
DF, DPF 100**



*In accordance with: ISO 14025, ISO 21930, EN15804+A2:2019/AC:2021*

|                          |                                                                                             |
|--------------------------|---------------------------------------------------------------------------------------------|
| Program:                 | The International EPD® System<br><a href="http://www.environdec.com">www.environdec.com</a> |
| Programme operator:      | EPD International AB                                                                        |
| EPD registration number: | S-P-13611                                                                                   |
| Publication date:        | 2024-06-20                                                                                  |
| Validity date:           | 2029-06-20                                                                                  |

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com).

Knauf Insulation EPDs could cover one or several products (multi-products). In the case the EPD covers multiple products, the results are based on worst-case results.

**Build on us.**

## Programme-related information and verification

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterization factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

|                                        |                                                                                                                                                                                                                                    |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Programme:</b>                      | The International EPD® System<br>EPD International AB<br>Box 210 60<br>SE-100 31 Stockholm<br>Sweden<br><a href="http://www.environdec.com">www.environdec.com</a><br><a href="mailto:info@environdec.com">info@environdec.com</a> |
| <b>EPD registration number:</b>        | S-P-13611                                                                                                                                                                                                                          |
| <b>Published:</b>                      | 2024-06-20                                                                                                                                                                                                                         |
| <b>Valid until:</b>                    | 2029-06-20                                                                                                                                                                                                                         |
| <b>EPD owner</b>                       | Knauf Insulation Sprl<br>Rue de Maestricht 95<br>4600 Visé (Belgium)                                                                                                                                                               |
| <b>Product Category Rules:</b>         | PCR 2019:14. Construction products (EN 15804+A2)<br>Version 1.3.2<br>Sub-PCR-005 Thermal insulation products (EN 16783: 2017) Version: 2019-12-20                                                                                  |
| <b>Product group classification:</b>   | UN CPC 37                                                                                                                                                                                                                          |
| <b>Reference year for plant data:</b>  | 2022                                                                                                                                                                                                                               |
| <b>Geographical application scope:</b> | Europe                                                                                                                                                                                                                             |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CEN standard EN 15804+A2 serves as the Core Product Category Rules (PCR)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Product category rules (PCR): PCR 2019:14. Construction products (EN 15804+A2) Version 1.3.2<br>Sub-PCR-005 Thermal insulation products (EN 16783: 2017) Version: 2019-12-20                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| PCR review was conducted by: The Technical Committee of the International EPD® System                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Independent third-party verification of the declaration and data, according to ISO 14025:2006.<br><br><input checked="" type="checkbox"/> EPD verification by EPD Process Certification*<br><br>Third-party verification: <i>Viktor Hakkarainen, Bureau Veritas (Certificate number: SE008541-1)</i> an approved certification body accountable for third-party verification.<br><br>Third-party verifier is accredited by: <i>SWEDAC - Sverige AB 1236</i><br><br>*For EPD Process Certification, an accredited certification body certifies and reviews the management process and verifies EPDs published on a regular basis. For details about third-party verification procedure of the EPDs, see the GPI. |
| Procedure for follow-up of data during EPD validity involves third party verifier:<br><input checked="" type="checkbox"/> Yes <input type="checkbox"/> No                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## General information


### Information about the company

#### Description of the organisation:

Knauf Insulation is a leading provider of glass and rock mineral wool, as well as wood wool insulation solutions. With more than 40 years of experience in the insulation industry, it is one of the most respected names in insulation worldwide.

As part of the Knauf Group, a €15.4bn turnover family-owned global manufacturer of building materials and construction systems, Knauf Insulation employs more than 6,000 employees and has 28 manufacturing sites in 15 countries, with a turnover of €2.5bn.

Knauf Insulation's mission is to challenge conventional thinking and create innovative insulation solutions that shape the way we live and build in the future, with care for the people who make them, the people who use them and the world we all depend on. Its vision is to lead the change in smarter insulation solutions for a better world.

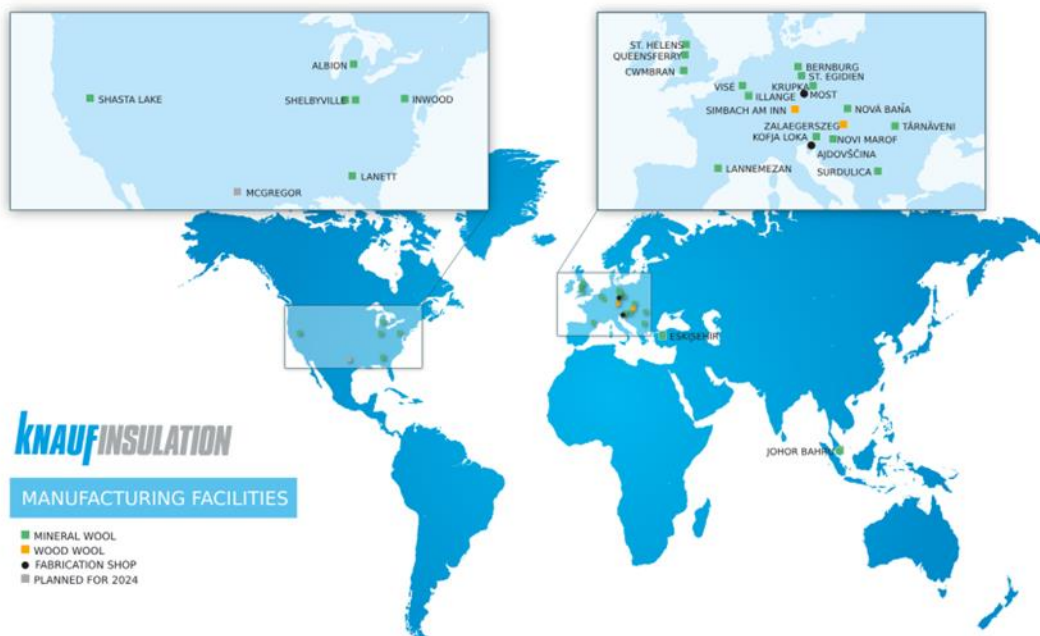

The Headquarters are located in Visé, in Belgium.





## Product-related or management system-related certifications:

All Knauf Insulation sites which are covered by EPD process certification system, including the sites considered for this EPD, are ISO 9001, ISO 14001, ISO 50001 and ISO 45001 certified under the scope "Design, Development and Production of Insulation Materials and Systems".

Knauf Insulation supports the Ten Principles of the United Nations Global Compact on human rights, labor, environment and anti-corruption.

## Name and location of production site:

The intended application of this product in the construction industry is within [Europe](#). The data used for the production stage life cycle assessment is related to production plants located in Sankt Egidien (Germany), Nova Bana (Slovakia).

Address: Bahnhofstraße 25, 09356 Sankt Egidien, Germany,  
Železničný rad 24, 968 01 Nová Baňa-Priemysel'ny' obvod, Slovakia.

## Information about Rock Mineral Wool production

The rock mineral wool (RMW) products for building construction are available in the form of slabs, boards, lamellas and rolls. RMW slabs are used as a thermal, acoustical and fire insulation product.

In general, the density for rock mineral wool products range goes from 20 to 200 kg/m<sup>3</sup>. In terms of composition, the inorganic part (92-98%) is composed of volcanic rocks, typically basalt, and some dolomite and with an increasing proportion of recycled material like slags from steel industry or in the form of briquettes, a mix of stone wool scrap, other secondary materials and cement.

The remaining fraction is the thermo set resin binder.



## Product information

**Product name:** TPS, TPD-L, BFP-035, SDP-035-GF, SDP-035, DF, DPF 100

**Product identification:** The declared insulation TPS, TPD-L, BFP-035, SDP-035-GF, SDP-035, DF, DPF 100 is a rock mineral wool, uncoated and unfaced of 1m<sup>2</sup> (considered for this EPD).

For the placement of the products on the construction market in the European Union/ EFTA (with exception of Switzerland and UK), the Regulation/ (EU) No 305/2011/ applies. The products concerned need Declarations of Performance / DoP R4238MPCPR, R4308LPCPR taking into consideration the harmonized product standard EN 13162 and the CE-mark.

**Product description:** The main application for TPS, TPD-L, BFP-035, SDP-035-GF, SDP-035, DF, DPF 100 is in pitched roof / floor / internal partition.

### UN CPC code:

37990: Non-metallic mineral products (including mineral wool, expanded mineral materials, worked mica, articles of mica, non-electrical articles of graphite or other carbon and articles of peat).

**Geographical scope:** The product is manufactured in Sankt Egidien (Germany), Nova Bana (Slovakia) Energy-related information is described in the next section. Regarding the market area, the product is mainly marketed in Europe.

### Energy:

Residual electricity mix (reference year 2021) and gas inputs (reference year 2019) are taken from Germany and Slovakia. 0.675 kg and 0.226 kg of CO<sub>2</sub> is released for 1 kWh of electricity consumption from Germany and Slovakia.

### Technical Characteristics:

| Parameter                                      | Value                          |
|------------------------------------------------|--------------------------------|
| Thermal conductivity/<br>EN 12667              | 0.036 W/(mK) at 10°C           |
| Water vapor diffusion resistance<br>(EN 12086) | 1                              |
| Thermal Resistance<br>(ISO 8301)               | 2.75 m <sup>2</sup> K/W        |
| Declared density range/<br>EN 1602             | 115 kg/m <sup>3</sup> (+/-10%) |
| Melting point of fibers<br>DIN 4102-17         | ≥ 1000°C                       |

## LCA information

### Functional unit / declared unit

The declared unit is 1m<sup>2</sup> of unfaced, uncoated rock mineral wool TPS, TPD-L, BFP-035, SDP-035-GF, SDP-035, DF, DPF 100 with R-value of 2.75 m<sup>2</sup>K/W (for a thickness of 100 mm and a declared lambda of 0.036 W/mK).

**Reference service life:** The RSL or durability of TPS, TPD-L, BFP-035, SDP-035-GF, SDP-035, DF, DPF 100 is as long as the lifetime of the building equipment in which it is used (at least 60 years).

### Time representativeness & Information on Specific Data:


The complete reference year used for the plant production data is 2022. The product group/s considered in this EPD is produced in multiple Knauf Insulation manufacturing sides with the equal weight.

The data which are used to carry out the LCA calculations contains >90% specific data and less than 10% generic data.

## Database(s) and LCA software used:

The LCA model, the data aggregation and environmental impacts are calculated with the software LCA for Experts (GaBi) 10.7 and its content version 2023.2. The impact models used are those indicated in EN 15804:2012+A2:2019.

## System diagram:

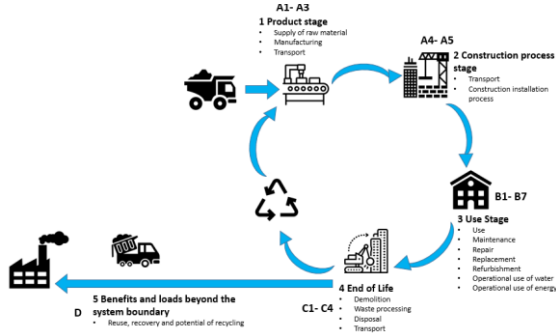

## Description of system boundaries:

The system boundary of the EPD follows the modularity approach defined by the EN 15804:2012+A2:2019.

## The type of EPD is cradle-to-grave.

For a comprehensive assessment, it is strongly recommended to consider the results from all the modules. Relying exclusively on Modules A1-A3 may lead to incomplete conclusions.

A comprehensive list and detailed explanations of each stage within the EPD are available as follows.

### The product stage (A1-A3) includes:

- A1 – raw material extraction and processing, processing of secondary material input (e.g. recycling processes),
- A2 – transport to the manufacturer and
- A3 – manufacturing.

This includes provision of all materials, products and energy, packaging processing and its transport, as well as waste processing up to the end-of-waste state or disposal of final residues during the product stage.

The LCA results are presented in an aggregated format for the product stage, where modules A1, A2, and A3 are consolidated into a single module, denoted as A1-A3.

| Product Parameters        | Value               |
|---------------------------|---------------------|
| Rock mineral wool weight  | 11.50 kg            |
| Area                      | 1m <sup>2</sup>     |
| Thickness                 | 100 mm              |
| Volume                    | 0.10 m <sup>3</sup> |
| Packaging – PE film       | 0.07 kg             |
| Packaging – Wooden pallet | 0.28 kg             |

### The construction process stage includes:

- A4 – transport to the construction site and
- A5 – installation into the building.

The transport to the building site (A4) and installation (A5) included in this LCA use the following parameters:

| Parameter                                                                   | Value                                    |
|-----------------------------------------------------------------------------|------------------------------------------|
| Average transport distance                                                  | 600 km                                   |
| Type of fuel and vehicle consumption or type of vehicle used for transport. | Truck Euro 6 (28 – 32 t / 22 t payload). |
| Truck capacity utilisation (including 30% of empty returns)                 | 81.29% of the weight capacity            |
| Loss of materials on site                                                   | 2%                                       |
| Packaging – PE film                                                         | 40% recycled, 60% incinerated            |
| Packaging – Wooden pallet                                                   | 40% recycled, 60% incinerated            |

The treatment and the transport of the packaging waste after the installation of the product (A5) has been considered.

### The Use stage (B1-B7) includes:

- B1: Use
- B2: Maintenance
- B3: Repair
- B4: Replacement
- B5: Refurbishment
- B6: Operational Energy Use
- B7: Operational Water Use

Once installation is complete, no actions or technical operations are required during the use stages until the end of life. Therefore, the mineral wool has no impact (excluding potential energy savings) on this stage.

### The end-of-life stage includes:

- C1 – de-construction, demolition,
- C2 – transport to waste processing,
- C3 – waste processing for reuse, recovery and/or recycling and
- C4 – disposal.

This includes provision of all transport, materials, products and related energy and water use. The common manual dismantling impact of insulation is considered as very small and can be neglected in C1.

Although glass mineral wool products from Knauf Insulation are partly recycled at their end-of-life, an established collection system does not yet exist. Therefore, the assumption chosen in this study, 100% landfill (C4) after the use phase, is the most conservative approach.

| Parameter                                                                   | Value                                                                                                         |
|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| Disposal type (mineral wool)                                                | 100% landfill                                                                                                 |
| Average transport distance waste (C2)                                       | 50 km                                                                                                         |
| Type of fuel and vehicle consumption or type of vehicle used for transport. | Truck-trailer, Euro 6, 34 - 40t gross weight / 27t payload capacity/ 40 L for 100 km. (if 100 % utilization). |
| Truck capacity utilization                                                  | 50 % of the weight capacity                                                                                   |

**Module D** includes reuse, recovery and/or recycling potentials. According to EN 15804:2012+A2:2019 any declared benefits and loads from net flows leaving the product system not allocated as co-products and having passed the end-of waste state shall be included in module D. Benefits considered in module D originate from packaging recycling or incineration.

### Recycled material

The mineral wool waste generated during the manufacturing process is recycled internally and fed back into the mineral wool production process at multiple stages.

Recycled content average for the considered plants for this product was calculated at 22% in Sankt Egidien and Nova Bana. The calculation is taking into account the % of secondary materials from external supply input into the batch against virgin raw materials supply. The external waste considerations are also following the ISO 14021 standard.

### Additional information:

All raw materials used in the manufacture of the declared product, the required energy, water consumption and the resulting emissions are considered in the LCA. As a result, recipe components with a share of less than 1% are included. All neglected processes contribute less than 5% to the total mass or less than 5% to the total energy consumption. For information, the impact of the glass mineral wool plant construction or manufacturing equipment is not taken into account in the life cycle assessment. Allocation criteria with by-products (mineral wool for ceiling tiles) are based on cost.

Materials required for fixing and installation are not included in the scope of this LCA. The impact of any additional construction products or materials not included in this EPD should be accounted for at building level. Regarding installation, this EPD only includes the environmental impacts relating to the product itself, such as material losses and packaging disposal.

Knauf Insulation adopts a conservative approach in its EPDs.

The conversion factor used in this EPD involves multiplying the results by 0.09 to obtain Environmental Impact Indicator results for 1 kg. An insulation product should always be characterized by its thickness and R-value. Solely considering the product's weight could potentially lead to misinterpretations.

### More information:

[www.knaufinsulation.com](http://www.knaufinsulation.com)

### Name and contact information of LCA practitioner:

Clara del Val  
Knauf Insulation Sprl  
Rue de Maestricht 95  
4600 Visé (Belgium)  
Contact : sustainability@knaufinsulation.com



## Content Declaration

The product does not contain substances on the "Candidate List of Substances of Very High Concern for Authorisation" under the REACH regulation (if above 0.1% of the mass).

| Product components            | Weight %             | Pre-consumer material, weight - % (out of total) | Post- consumer % (out of total) | Renewable material, weight- % (out of total) |
|-------------------------------|----------------------|--------------------------------------------------|---------------------------------|----------------------------------------------|
| Basalt                        | 55 - 60              | 0                                                | 0                               | 0                                            |
| Dolomite - Limestone          | 15 - 20              | 0                                                | 0                               | 0                                            |
| Recovered metallurgical slags | 5 - 20               | 100                                              | 0                               | 0                                            |
| Thermo set resin binder       | 2 - 5                | 0                                                | 0                               | 0                                            |
| Additives                     | < 1                  | 0                                                | 0                               | 0                                            |
| Packaging Materials           | Weight, kg/ DU or FU | Weight -% (versus the product)                   |                                 |                                              |
| Packaging - PE film           | 0.07                 | 0.63                                             |                                 |                                              |
| Packaging - Wooden pallet     | 0.28                 | 2.43                                             |                                 |                                              |
| Cardboard/paper               | 0.00                 | 0.00                                             |                                 |                                              |
| TOTAL                         | 0.35                 | 3.07                                             |                                 |                                              |

## Declared Modules, geography, share of specific data (in GWP-GHG indicator) & data variation

Life cycle stages as defined in the European standard EN 15978 :2011 and the description of the system boundaries for the reference product LCA (X = included in the LCA, MND = module is not declared)

|                             | Product stage       |           |               | Construction process stage |                           | Use stage |             |        |             |               |                        |                       |                            | End of life stage |                  |          |        | Resource recovery<br>Reuse-Recovery-Recycling-potential |
|-----------------------------|---------------------|-----------|---------------|----------------------------|---------------------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|----------------------------|-------------------|------------------|----------|--------|---------------------------------------------------------|
|                             | Raw material supply | Transport | Manufacturing | Transport                  | Construction installation | Use       | Maintenance | Repair | Replacement | Refurbishment | Operational energy use | Operational water use | De-construction demolition | Transport         | Waste processing | Disposal |        |                                                         |
| Module                      | A1                  | A2        | A3            | A4                         | A5                        | B1        | B2          | B3     | B4          | B5            | B6                     | B7                    | C1                         | C2                | C3               | C4       | D      |                                                         |
| Modules declared            | X                   | X         | X             | X                          | X                         | X         | X           | X      | X           | X             | X                      | X                     | X                          | X                 | X                | X        | X      |                                                         |
| Geography                   | Europe              | Europe    | Europe        | Europe                     | Europe                    | Europe    | Europe      | Europe | Europe      | Europe        | Europe                 | Europe                | Europe                     | Europe            | Europe           | Europe   | Europe |                                                         |
| Share of specific data      | > 90 %              |           |               |                            |                           |           |             |        |             |               |                        |                       |                            |                   |                  |          |        |                                                         |
| Variation* – products       | <10 %               |           |               |                            |                           |           |             |        |             |               |                        |                       |                            |                   |                  |          |        |                                                         |
| Variation** – Nova Bana     | -8.7%               |           |               |                            |                           |           |             |        |             |               |                        |                       |                            |                   |                  |          |        |                                                         |
| Variation** – Sankt Egidien | 8.7%                |           |               |                            |                           |           |             |        |             |               |                        |                       |                            |                   |                  |          |        |                                                         |

\*Variation regarding the average EPD result in terms of GWP-GHG indicator

\*\*Variation regarding the average EPD result in terms of GWP-GHG indicator amongst products covered with this EPD

According to PCR 2019:14 v1.3.2 infrastructure should be outside of the system boundary. However, infrastructure impacts could have been considered in some GaBi background datasets.

## Environmental performance

**Potential environmental impacts:** 1m<sup>2</sup> of rock mineral wool TPS, TPD-L, BFP-035, SDP-035-GF, SDP-035, DF, DPF 100 with a thickness of 100 mm and the R-value of 2.75 m<sup>2</sup>K/W.

*These results are representative of all the products mentioned in this EPD.*

| ENVIRONMENTAL IMPACTS |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |           |          |          |          |          |          |          |           |           |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------|----------|----------|----------|----------|----------|-----------|-----------|
| Parameter             | Unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | A1-3***   | A4       | A5       | B1-B7    | C1       | C2       | C3       | C4        | D**       |
| GWP-fossil            | kg CO <sub>2</sub> eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1.52E+01  | 5.07E-01 | 4.39E-01 | 0.00E+00 | 0.00E+00 | 4.45E-02 | 0.00E+00 | 1.71E-01  | -1.71E-01 |
| GWP-biogenic          | kg CO <sub>2</sub> eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | -4.13E-01 | 0.00E+00 | 4.51E-01 | 0.00E+00 | 0.00E+00 | 5.54E-04 | 0.00E+00 | -2.22E-02 | 0.00E+00  |
| GWP-luluc             | kg CO <sub>2</sub> eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 6.02E-03  | 4.58E-03 | 2.77E-04 | 0.00E+00 | 0.00E+00 | 4.01E-04 | 0.00E+00 | 5.11E-04  | -1.47E-05 |
| GWP-total             | kg CO <sub>2</sub> eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 1.48E+01  | 5.12E-01 | 8.90E-01 | 0.00E+00 | 0.00E+00 | 4.55E-02 | 0.00E+00 | 1.50E-01  | -1.71E-01 |
| ODP                   | kg CFC 11 eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 7.12E-11  | 6.44E-14 | 1.54E-12 | 0.00E+00 | 0.00E+00 | 5.63E-15 | 0.00E+00 | 6.75E-16  | -9.75E-13 |
| AP                    | mol H <sup>+</sup> eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 6.23E-02  | 5.13E-04 | 1.35E-03 | 0.00E+00 | 0.00E+00 | 4.62E-05 | 0.00E+00 | 1.24E-03  | -3.00E-04 |
| EP-freshwater         | kg P eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 1.36E-05  | 1.81E-06 | 3.60E-07 | 0.00E+00 | 0.00E+00 | 1.58E-07 | 0.00E+00 | 2.92E-07  | 8.37E-08  |
| EP-marine             | kg N eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 7.52E-03  | 1.58E-04 | 1.80E-04 | 0.00E+00 | 0.00E+00 | 1.45E-05 | 0.00E+00 | 3.22E-04  | -9.99E-05 |
| EP-terrestrial        | mol N eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 8.28E-02  | 1.90E-03 | 2.05E-03 | 0.00E+00 | 0.00E+00 | 1.74E-04 | 0.00E+00 | 3.53E-03  | -1.11E-03 |
| POCP                  | kg NMVOC eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 2.56E-02  | 4.92E-04 | 5.99E-04 | 0.00E+00 | 0.00E+00 | 4.49E-05 | 0.00E+00 | 9.74E-04  | -3.30E-04 |
| ADP-minerals&metals*  | kg Sb eq.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 7.39E-07  | 3.28E-08 | 1.71E-08 | 0.00E+00 | 0.00E+00 | 2.87E-09 | 0.00E+00 | 1.64E-08  | -8.90E-09 |
| ADP-fossil*           | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 2.18E+02  | 6.74E+00 | 4.80E+00 | 0.00E+00 | 0.00E+00 | 5.89E-01 | 0.00E+00 | 2.31E+00  | -4.12E+00 |
| WDP*                  | m <sup>3</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 8.95E-01  | 5.98E-03 | 5.93E-02 | 0.00E+00 | 0.00E+00 | 5.23E-04 | 0.00E+00 | 1.87E-02  | -1.83E-02 |
| Acronyms              | GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption |           |          |          |          |          |          |          |           |           |

\* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.

\*\* : [Life Cycle D stage covers benefits and loads beyond the system boundary stage (reuse, recovery and recycling potential) therefore, when summing up results, this stage should be considered separately].

\*\*\* The indicator's results are calculated using a reference product, with equal weighting between plants, if this is a single plant, it means 100% for that plant.

## Potential environmental impact – additional mandatory and voluntary indicators

These results are representative of all the products mentioned in this EPD.

| Indicator   | Unit                   | Tot.A1-A3 | A4       | A5       | B1-B7    | C1       | C2       | C3       | C4       | D         |
|-------------|------------------------|-----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| GWP-GHG [2] | kg CO <sub>2</sub> eq. | 1.53E+01  | 5.13E-01 | 4.43E-01 | 0.00E+00 | 0.00E+00 | 4.51E-02 | 0.00E+00 | 1.73E-01 | -1.74E-01 |

[2] The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

**Use of resources:** 1m<sup>2</sup> of rock mineral wool TPS, TPD-L, BFP-035, SDP-035-GF, SDP-035, DF, DPF 100 with a thickness of 100 mm and the R-value of 2.75 m<sup>2</sup>K/W.

These results are representative of all the products mentioned in this EPD.

| RESOURCES USE |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |          |          |           |          |          |          |          |          |           |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|-----------|----------|----------|----------|----------|----------|-----------|
| Parameter     | Unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | A1-3***  | A4       | A5        | B1-B7    | C1       | C2       | C3       | C4       | D*        |
| PERE          | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1.14E+01 | 4.90E-01 | -2.83E+00 | 0.00E+00 | 0.00E+00 | 4.29E-02 | 0.00E+00 | 3.11E-01 | 0.00E+00  |
| PERM          | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 4.17E+00 | 0.00E+00 | 8.33E-02  | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| PERT          | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1.55E+01 | 4.90E-01 | -2.75E+00 | 0.00E+00 | 0.00E+00 | 4.29E-02 | 0.00E+00 | 3.11E-01 | 0.00E+00  |
| PENRE         | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 2.05E+02 | 6.76E+00 | 2.22E+02  | 0.00E+00 | 0.00E+00 | 5.92E-01 | 0.00E+00 | 2.31E+00 | 0.00E+00  |
| PENRM         | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1.24E+01 | 0.00E+00 | 2.48E-01  | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| PENRT         | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 2.18E+02 | 6.76E+00 | 2.23E+02  | 0.00E+00 | 0.00E+00 | 5.92E-01 | 0.00E+00 | 2.31E+00 | 0.00E+00  |
| SM            | kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1.04E-03 | 0.00E+00 | 2.08E-05  | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| RSF           | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0.00E+00 | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| NRSF          | MJ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 0.00E+00 | 0.00E+00 | 0.00E+00  | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| FW            | m <sup>3</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 4.66E-02 | 5.37E-04 | 1.94E-03  | 0.00E+00 | 0.00E+00 | 4.70E-05 | 0.00E+00 | 5.69E-04 | -6.82E-04 |
| Acronyms      | PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials;<br>PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials;<br>PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF =<br>Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water |          |          |           |          |          |          |          |          |           |

\*: [Life Cycle D stage covers benefits and loads beyond the system boundary stage (reuse, recovery and recycling potential) therefore, when summing up results, this stage should be considered separately].

\*\*\* The indicator's results are calculated using a reference product, with equal weighting between plants, if this is a single plant, it means 100% for that plant.

**Waste production and output flows:** 1m<sup>2</sup> of rock mineral wool TPS, TPD-L, BFP-035, SDP-035-GF, SDP-035, DF, DPF 100 with a thickness of 100 mm and the R-value of 2.75 m<sup>2</sup>K/W.

*These results are representative of all the products mentioned in this EPD.*

| WASTE PRODUCTION AND OUTPUT FLOWS |      |          |          |          |          |          |          |          |          |           |
|-----------------------------------|------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| Parameter                         | Unit | A1-3***  | A4       | A5       | B1-B7    | C1       | C2       | C3       | C4       | D*        |
| Hazardous waste disposed          | kg   | 5.74E-06 | 2.09E-11 | 1.15E-07 | 0.00E+00 | 0.00E+00 | 1.83E-12 | 0.00E+00 | 2.45E-10 | -2.17E-10 |
| Non-hazardous waste disposed      | kg   | 1.33E+00 | 1.03E-03 | 2.79E-01 | 0.00E+00 | 0.00E+00 | 9.02E-05 | 0.00E+00 | 1.15E+01 | 1.68E-03  |
| Radioactive waste disposed        | kg   | 5.87E-03 | 1.27E-05 | 1.36E-04 | 0.00E+00 | 0.00E+00 | 1.11E-06 | 0.00E+00 | 2.42E-05 | -1.77E-04 |
| Components for reuse              | kg   | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| Material for recycling            | kg   | 0.00E+00 | 0.00E+00 | 1.40E-01 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| Materials for energy recovery     | kg   | 0.00E+00 | 0.00E+00 | 2.10E-01 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| Exported energy, electricity      | MJ   | 0.00E+00 | 0.00E+00 | 5.75E-01 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |
| Exported energy, thermal          | MJ   | 0.00E+00 | 0.00E+00 | 1.03E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00  |

\*: [Life Cycle D stage covers benefits and loads beyond the system boundary stage (reuse, recovery and recycling potential) therefore, when summing up results, this stage should be considered separately].

\*\*\* The indicator's results are calculated using a reference product, with equal weighting between plants, if this is a single plant, it means 100% for that plant.



**Additional impact categories and indicators:** 1m<sup>2</sup> of rock mineral wool TPS, TPD-L, BFP-035, SDP-035-GF, SDP-035, DF, DPF 100 with a thickness of 100 mm and the R-value of 2.75 m<sup>2</sup>K/W.

*These results are representative of all the products mentioned in this EPD.*

| ADDITIONAL IMPACT CATEGORIES AND INDICATORS |                                                                                                                                                                                                                                             |          |          |          |          |          |          |          |          |           |
|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|----------|----------|----------|----------|----------|----------|----------|-----------|
| Parameter                                   | Unit                                                                                                                                                                                                                                        | A1-3***  | A4       | A5       | B1-B7    | C1       | C2       | C3       | C4       | D*        |
| PM                                          | Disease Incidence                                                                                                                                                                                                                           | 4.87E-07 | 3.82E-09 | 1.07E-08 | 0.00E+00 | 0.00E+00 | 3.40E-10 | 0.00E+00 | 1.54E-08 | -5.01E-09 |
| IRP                                         | kBq U235 eq.                                                                                                                                                                                                                                | 4.46E-01 | 1.89E-03 | 1.18E-02 | 0.00E+00 | 0.00E+00 | 1.65E-04 | 0.00E+00 | 2.54E-03 | -2.94E-02 |
| ETP- fw                                     | CTUe                                                                                                                                                                                                                                        | 6.21E+01 | 4.83E+00 | 1.50E+00 | 0.00E+00 | 0.00E+00 | 4.22E-01 | 0.00E+00 | 1.31E+00 | -1.27E+00 |
| HTP-c                                       | CTUh                                                                                                                                                                                                                                        | 6.63E-09 | 9.79E-11 | 1.45E-10 | 0.00E+00 | 0.00E+00 | 8.57E-12 | 0.00E+00 | 1.94E-10 | -4.62E-11 |
| HTP- nc                                     | CTUh                                                                                                                                                                                                                                        | 5.56E-07 | 4.36E-09 | 1.20E-08 | 0.00E+00 | 0.00E+00 | 3.81E-10 | 0.00E+00 | 2.05E-08 | -1.15E-09 |
| SQP                                         | dimensionless                                                                                                                                                                                                                               | 7.78E+01 | 2.82E+00 | 1.72E+00 | 0.00E+00 | 0.00E+00 | 2.46E-01 | 0.00E+00 | 4.66E-01 | -1.84E+00 |
| Acronyms                                    | PM = Particulate matter emissions; IRP= Ionising radiation, human health; ETP-fw: Ecotoxicity (freshwater); ETP-c: Human toxicity, cancer effects; HTP-nc: Human toxicity, non-cancer effects; SQP: Land use related impacts / soil quality |          |          |          |          |          |          |          |          |           |

### [Information on biogenic carbon content](#)

| Results per functional or declared unit |          |                        |
|-----------------------------------------|----------|------------------------|
| BIOGENIC CARBON CONTENT                 | kg C     | kg CO <sub>2</sub> eq. |
| Biogenic carbon content in product      | 0.00E+00 | 0.00E+00               |
| Biogenic carbon content in packaging    | 1.40E-01 | 5.13E-01               |

*Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>.*

*\*: [Life Cycle D stage covers benefits and loads beyond the system boundary stage (reuse, recovery and recycling potential) therefore, when summing up results, this stage should be considered separately].*

*\*\*\* The indicator's results are calculated using a reference product, with equal weighting between plants, if this is a single plant, it means 100% for that plant.*

## LCA interpretation

### ENVIRONMENTAL IMPACTS

All impact categories, except the Abiotic Depletion Potential Element and the Ozone Depletion Potential, are dominated by the manufacturing processes. This can be explained by the huge impact of the energy use (electricity, natural gas and coke) for rock mineral wool production.

**The Global Warming Potential (GWP-total)** is dominated by the manufacturing in the cupola, mostly due to CO<sub>2</sub> emissions from raw materials and energy consumption.

**The Depletion Potential of the Stratospheric Ozone layer (ODP)** is mostly influenced by the manufacturing phase (module A1–A3) and significantly influenced using electricity.


**The Acidification Potential (AP)** is also dominated by the manufacturing due to the emissions related to the processes and the energy consumption.

**The Formation Potential of Tropospheric Ozone (POCP)** is dominated by emissions from the manufacturing processes (including energy use) and raw materials.

**The Formation Potential of Tropospheric Ozone (POCP)** is particularly dominated by the manufacturing (emissions in the cupola furnace and other unit processes).

**The Abiotic Depletion Potential for Non-Fossil Resources (ADP- minerals & metals)** impact mainly comes from the manufacturing of the product.

**The Abiotic Depletion Potential for Fossil Resources Potential (ADP-fossil)** is dominated by the use of coke as energy carrier. Next to the coke, we have also the impact of natural gas and upstream the electricity energy mix.

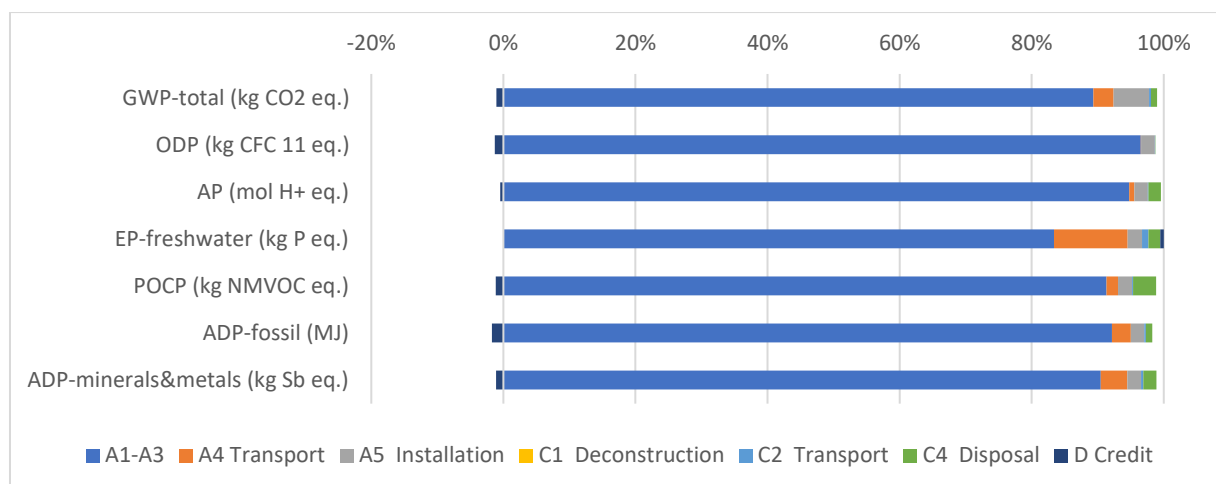

The variation in Global Warming Potential (GWP) results (A1-A3) between the manufacturing sites covered by this EPD and the average results is 8.7%. Nova Bana plant has a lower environmental impact compared to Sankt Egidien plant due to slight differences in energy and raw material consumption.

## RESOURCES USE

**Total Use of Non-Renewable Primary Energy Resources (PENRT)** is dominated by the manufacturing of rock mineral wool products (especially due to the energy carrier, coke).

**Total Use of Renewable Primary Energy Resources (PERT)** is dominated by the manufacturing, mostly due to electricity consumption and packaging.

## References

### **International EPD® System**

General Programme Instructions of the International EPD® System. Version 4.0.

Product category rules (PCR): PCR 2019:14 v1.3.2. Construction products (EN 15804:A2) Version 1.0

c-PCR-005 Thermal insulation products (EN 16783: 2017) Version: 2019-12-20

### **ISO 14025**

DIN EN ISO 14025:2011-10: Environmental labels and declarations – Type III environmental declarations – Principles and procedures

### **EN 15804:2012+A2:2019/AC:2021**

EN 15804:2012+A2:2019/AC:2021: Sustainability of construction works – Environmental Product Declarations – Core rules for the product category of construction products

### **EN 16783:2017**

Thermal insulation products – Product category rules (PCR) for factory made and in-situ formed products for preparing environmental product declarations

### **LCA for Experts 10.7**

LCA for Experts 10.7: Software and database for life cycle engineering. LBP, University of Stuttgart and Sphera, 2023.

### **DoP R4238MPCPR, R4308LPCPR**

Declaration of Performance

[www.dopki.com](http://www.dopki.com)

### **EN 1602**

EN1602: 2013 Thermal insulation products for building applications – Determination of the apparent density

### **EN 12667**

EN 12667: 2001 Thermal performance of building materials and products – Determination of thermal resistance by means of guarded hot plate and heat flow meter methods – Products of high and medium thermal resistance

### **EN 13162**

EN 13162:2012 Thermal insulation products for buildings – Factory made mineral wool (MW) products – Specification

### **EN 12086**

EN 12086: 2013 Thermal insulating products for building applications –determination of water vapour transmission properties.

### **EN 15978: 2011**

EN 15978: 2011 Sustainability of construction works – Assessment of environmental performance of buildings – Calculation method.

### **ISO 8301:1991**

Thermal insulation – Determination of steady-state thermal resistance and related properties – Heat flow meter apparatus.

**ISO 21930:2017**

Sustainability in buildings and civil engineering works – Core rules for environmental product declarations of construction products and services

**2024\_04\_30 SDP-035, SDP-035 GF, TPS, DF-NB,SE (I-report)**

I-report is an interactive report created with GaBi based on the scenario. More details on the product characteristics, plant allocation and scenario can be found in the i-report.

**BR\_RMW\_2022 (Background Report)**

Calculation rules for the Life Cycle Assessment and Requirements and more details about the production on the Background Report.

## Contact information:

|                     |                                                                                                                                                                                                                                                                                                                                      |
|---------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EPD owner:          | <br>Knauf Insulation<br>Rue de Maestricht 95<br>4600 Visé<br>Belgium<br><a href="http://www.knaufinsulation.com">www.knaufinsulation.com</a><br>Contact: <a href="mailto:sustainability@knaufinsulation.com">sustainability@knaufinsulation.com</a> |
| LCA support:        | <br>CO <sub>2</sub> Logic<br>Cantersteen 47,<br>1000 Brussels<br>Belgium<br><br><br>Sphera<br>Hauptstraße 111-113<br>70771 Leinfelden-Echterdingen<br>Germany     |
| Programme operator: | <br>EPD International AB<br><a href="mailto:info@environdec.com">info@environdec.com</a>                                                                                                                                                          |
| Certification body  | <br>Fabrikgatan 13<br>41250 Göteborg,<br>Sweden                                                                                                                                                                                                   |