

ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025 and EN 15804+A2



Carlisle Construction Materials GmbH RESISTIT® ESK



Owner of the declaration

Carlisle Construction Materials GmbH
Gothaer Straße 44
99880 Waltershausen
Germany

Product

RESISTIT® ESK

Declared product / Functional unit

1 m²

This declaration is based on Product Category Rules

EN 15804:2012 + A2:2019,
NPCR 022 Part B for roof waterproofing
(v2)

Program operator:

EPD Norway
Majorstuen P.O. Box 5250
N-0303 Oslo
Norway

Declaration number

NEPD-10173-10173-2

Registration number

NEPD-10173-10173-2

Issue date

01.08.2025

Valid to

31.07.2030

EPD Software

Emidat EPD Tool v1.0.0

General Information

Product

RESISTIT® ESK

Program Operator

EPD Norway
Majorstuen P.O. Box 5250
N-0303 Oslo
Norway
Phone: +47 23 08 80 00
Email: post@epd-norge.no

Declaration Number

NEPD-10173-10173-2

This declaration is based on Product Category Rules

EN 15804:2012 + A2:2019,
NPCR 022 Part B for roof waterproofing (v2)

Statements

The owner of the declaration shall be liable for the underlying information and evidence. EPD Norway shall not be liable with respect to manufacturer, life cycle assessment data and evidences.

Functional unit

1 m² with a reference service life of 30 years

General information on verification of EPD from EPD tools

Independent verification of data, other environmental information and the declaration according to ISO 14025:2010, § 8.1.3 and § 8.1.4. Verification of each EPD is made according to EPD Norway's guidelines for verification and approval requiring that tools are i) integrated into the company's environmental management system, ii) the procedures for use of the EPD tool are approved by EPD-Norway, and iii) the process is reviewed annually by an independent third party verifier. See Appendix G of EPD-Norway's General Programme Instructions for further information on EPD tools.

Verification of EPD tool

Charlotte Merlin, FORCE Technology
(no signature required)

Owner of the declaration

Carlisle Construction Materials GmbH

Contact person

andreas.koellner@ccm-europe.com

Phone

01755837403

Email

andreas.koellner@ccm-europe.com

Manufacturer

Carlisle Construction Materials GmbH
Gothaer Straße 44
99880 Waltershausen, Germany

Place of production

Waltershausen, Germany

Management system

ISO 9001, ISO 14001, ISO 50001

Issue date

01.08.2025

Valid to

31.07.2030

Year of study

2024

Comparability

EPDs of construction products may not be comparable if they do not comply with EN 15804 and are not seen in a building context. EPD data may not be comparable if the datasets used are not developed in accordance with EN 15804 and if the background systems are not based on the same database (including primary and secondary data).


Development and verification of EPD

The declaration was created using the Emidat EPD tool v1.0, developed by Emidat GmbH. The EPD tool has been approved by EPD Norway.

Developer of EPD: Andreas Kollner

Reviewer of company-specific input data and EPD: Nils Sperfeld

Approved



Håkon Hauan, CEO EPD-Norge


Product

Product description

RESISTIT® ESK waterproofing membranes are made of high-performance EPDM and are reinforced with a glass fiber insert in the center. The underside is coated with a self-adhesive, polymer-modified bitumen layer. The self-adhesive bitumen layer on the reverse side of the membrane guarantees a permanent, high-performance bond to the respective substrate and enables quick and reliable installation.

RESISTIT® ESK is permanently resistant to water, chemicals, static and dynamic loads, and is resistant to frost and rot.

The elastomeric membrane is resistant to UV radiation, all weather influences, and pollutants and complies with Class E according to DIN EN 13501-1.

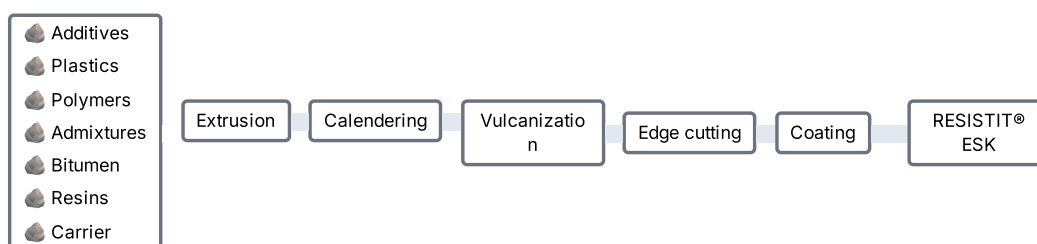

Facade membranes are widely used in construction and civil engineering for their excellent waterproofing properties. They are applied in various areas to prevent water ingress and protect structures from moisture-related damage.

Product specification

Name of ingredient	Share of total weight	Country of origin
Additives	0 - 2 %	Germany
Admixtures	2 - 10 %	Germany
Bitumen	10 - 25 %	Germany
Carrier	25 - 50 %	Various
Plastics	25 - 50 %	Germany
Polymers	2 - 10 %	Germany
Resins	0 - 2 %	Various

Technical data

	Unit	Value
Thickness	mm	1.6
Total mass	kg	1.7

Market

Germany

LCA: Calculation rules

Functional unit

1 m²

Reference service life

30 years

Data quality

The foreground data are based on extensive and detailed data collection at the production site of the manufacturer, covering key processes such as raw material sourcing, formulation, and manufacturing. These foreground data are fully linked with corresponding datasets from the background database (Eurobitume, ecoinvent 3.10) or with EN15804+A2-compliant EPDs, ensuring consistency, reliability, and maintaining alignment with the latest industry standards.

The overall data representativeness is rated as good with an overall score of 4.04/5, in accordance with EN 15804+A2 Annex E guidance on data quality assessment, considering geographical, technical, and temporal representativeness.

System boundaries (X=included, MND=module not declared)

	Production			Installation	Use stage								End-of-Life				Next product system
	Raw material supply	Transport	Manufacturing	Transport	Installation Process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational Energy Use	Operational Water Use	Demolition	Transport	Waste Processing	Disposal	Benefits and loads beyond the system boundary
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	x	x	x	x	x	MND	MND	MND	MND	MND	MND	MND	x	x	x	x	x
Geography			DE	DE	DE	MND	MND	MND	MND	MND	MND	MND	DE	DE	DE	DE	DE

For the geographies modeled in A1 and A2, refer to *Product specification*.

Type of EPD: Cradle to gate with options A4, A5, C1, C2, C3, C4 and D

Stage of Material Production and Construction

Module A1: Extraction and processing of bituminous raw materials

Module A2: Transportation of raw material to the manufacturing plant

Module A3: Bituminous waterproofing membrane production at the plant and waste treatment

Module A4: Transportation to the construction site

Module A5: Includes all processes associated with product installation, as well as the production, transportation, and treatment of unused bitumen waterproofing membrane. Includes therefore all additional material due to material overlap which is considered as installation loss.

Disposal Stage

Module C1: Demolition/Dismantling of the waterproofing layer

Module C2: Transportation of mixed roofing material waste for processing

Module C3: Incineration of bitumen

Module C4: Final disposal of bitumen waste in sanitary landfill

Credits and burdens outside the system boundaries

Module D: Credits and burdens for the use of bitumen waste as a secondary fuel or thermal/electrical energy generation

Cut-off criteria

No cut-offs were applied.

Allocation

Elementary flows (energy and fuels, ancillary materials and waste) data was collected on production-process-level. Using the total output of the production process in 2024, elementary flows are assigned to 1 declared unit based on mass.

LCA: Scenarios and additional technical information

The following information describe the scenarios in the different modules of the EPD.

Transport to the building site (A4)	Value	Unit
Transported mass	3.38	kg
Truck: Distance	650.00	km
Truck: Energy demand	1.58	MJ / t*km
Truck: Activity	transport, freight, lorry >32 metric ton, EURO6	-
Truck: Capacity utilization	53.30	%

Installation into the building (A5)	Value	Unit
Treatment of Cardboard waste	Incineration	
Treatment of Wooden pallets waste	Reuse	
Treatment of Plastic film waste	Recycling	
Welding method	Hot air welding	-
Installation method	Glued, bonding agent, one layer	-
Additional material due to overlap	12.00	%
Electricity	0.01	kWh
Bonding agent	0.30	kg

The resource consumption in A5 depends on the welding method and the installation method, according to EN 17388.

Transport to the waste facility (C2)	Value	Unit
Mass to recycling	0.17	kg
Mass to landfill	0.76	kg
Mass to incineration	0.76	kg
Distance to landfill by truck	50.00	km
Distance to incineration by truck	50.00	km
Distance to recycling by truck	50.00	km
Truck: Activity	transport, freight, lorry >32 metric ton, EURO6	-
Truck: Capacity utilization	53.30	%
Truck: Distance	50.00	km
Truck: Energy demand	1.58	MJ / t*km

Transportation distances are based on JRC Technical Report, Model for Life Cycle Assessment (LCA) of buildings' (2018).

Waste processing (C3)	Value	Unit
Material for incineration	0.76	kg
Material for recycling	0.17	kg

Disposal (C4)	Value	Unit
Material for landfill	0.76	kg

Reuse, recovery and/or recycling potentials (D)	Value	Unit
Amount of secondary material that the system takes in	0	kg
Substitution of rubber	0.17	kg
Exported electrical energy	2.98	MJ
Exported thermal energy	5.94	MJ

Calculation of benefits and loads per EN 15804+A2.

LCA: Results

Core environmental impact indicators

Indicator	Unit	A1-3	A4	A5	C1	C2	C3	C4	D
GWP-total	kg CO ₂ -eq.	5.50e+00	2.27e-01	1.84e+00	0	8.81e-03	2.45e+00	7.21e-02	-1.31e+00
GWP-fossil	kg CO ₂ -eq.	5.33e+00	2.27e-01	1.61e+00	0	8.80e-03	2.44e+00	7.05e-02	-1.27e+00
GWP-biogenic	kg CO ₂ -eq.	1.49e-01	1.14e-04	2.31e-01	0	4.42e-06	2.19e-03	1.64e-03	-3.47e-02
GWP-luluc	kg CO ₂ -eq.	1.94e-02	8.07e-05	2.69e-03	0	3.13e-06	2.54e-05	1.53e-06	-1.14e-03
ODP	kg CFC-11-Eq	3.33e-07	4.74e-09	3.23e-06	0	1.83e-10	8.03e-10	2.57e-10	-3.98e-08
AP	mol H+-Eq	1.87e-02	5.37e-04	6.52e-03	0	2.08e-05	3.79e-04	5.27e-05	-3.04e-03
EP-freshwater	kg P-Eq	1.46e-03	1.60e-05	3.62e-04	0	6.20e-07	9.15e-06	5.29e-07	-6.18e-04
EP-marine	kg N-Eq	3.81e-03	1.41e-04	1.21e-03	0	5.45e-06	1.62e-04	1.60e-03	-6.77e-04
EP-terrestrial	mol N-Eq	3.85e-02	1.52e-03	1.29e-02	0	5.90e-05	1.59e-03	2.34e-04	-6.35e-03
POCP	kg NMVOC-Eq	2.41e-02	9.32e-04	7.06e-03	0	3.61e-05	4.18e-04	1.05e-04	-4.11e-03
ADPE	kg Sb-Eq	6.05e-05	6.49e-07	1.38e-05	0	2.52e-08	2.59e-07	1.75e-08	-8.24e-06
ADPF	MJ, net calorific value	1.37e+02	3.41e+00	3.68e+01	0	1.32e-01	4.38e-01	1.80e-01	-2.65e+01
WDP	m ³ world Eq deprived	1.91e+00	1.71e-02	4.65e-01	0	6.64e-04	1.30e-01	1.26e-03	-3.87e-01

GWP-total: Global Warming Potential - total **GWP-fossil:** Global warming potential - fossil **GWP-biogenic:** Global Warming Potential - biogenic **GWP-luluc:** Global Warming Potential - luluc **ODP:** Depletion potential of the stratospheric ozone layer **AP:** Acidification potential, Accumulated Exceedance **EP-freshwater:** Eutrophication potential - freshwater **EP-marine:** Eutrophication potential - marine **EP-terrestrial:** Eutrophication potential - terrestrial **POCP:** Photochemical Ozone Creation Potential **ADPE:** Abiotic depletion potential - non-fossil resources **ADPF:** Abiotic depletion potential - fossil resources **WDP:** Water (user) deprivation potential

Additional indicators

Indicator	Unit	A1-3	A4	A5	C1	C2	C3	C4	D
PM	disease incidence	2.32e-07	2.21e-08	8.54e-08	0	8.57e-10	2.42e-09	1.24e-09	-3.62e-08
IRP	kBq U235-Eq	4.60e-01	4.14e-03	8.52e-02	0	1.61e-04	2.09e-03	3.00e-04	-1.48e-01
ETP-fw	CTUe	3.93e+01	8.08e-01	1.58e+01	0	3.13e-02	4.24e+00	2.24e-01	-5.04e+00
HTP-c	CTUh	1.80e-08	1.45e-09	1.43e-08	0	5.63e-11	5.94e-10	4.76e-11	-2.96e-09
HTP-nc	CTUh	5.53e-08	2.25e-09	1.67e-08	0	8.71e-11	9.41e-10	4.27e-10	-7.76e-09
SQP	dimensionless	2.15e+01	3.43e+00	5.24e+00	0	1.33e-01	2.78e-01	4.36e-01	-3.09e+00

PM: Potential incidence of disease due to PM emissions **IRP:** Potential Human exposure efficiency relative to U235 **ETP-fw:** Potential Comparative Toxic Unit for ecosystems **HTP-c:** Potential Comparative Toxic Unit for humans - cancer effects **HTP-nc:** Potential Comparative Toxic Unit for humans - non-cancer effects **SQP:** Potential Soil quality index

IRP: This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

ETP-fw, HTP-c, HTP-nc and SQP: The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with these indicators.

Use of resources

Indicator	Unit	A1-3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	5.47e+00	5.41e-02	1.12e+00	0	2.10e-03	3.12e-02	5.56e-03	-2.08e+00
PERM	MJ	1.05e+00	0	-8.75e-01	0	0	-2.63e-02	0	0
PERT	MJ	6.52e+00	5.41e-02	2.46e-01	0	2.10e-03	4.89e-03	5.56e-03	-2.08e+00
PENRE	MJ	8.66e+01	3.41e+00	2.50e+01	0	1.32e-01	4.38e-01	1.80e-01	-2.19e+01
PENRM	MJ	5.02e+01	0	1.16e+01	0	0	-2.75e+01	0	-4.60e+00
PENRT	MJ	1.37e+02	3.41e+00	3.66e+01	0	1.32e-01	-2.71e+01	1.80e-01	-2.65e+01
SM	kg	0	0	0	0	0	0	0	1.73e-01
RSF	MJ	0	0	0	0	0	0	0	0
NRSF	MJ	0	0	0	0	0	0	0	0
FW	m³	4.82e-02	4.96e-04	1.36e-02	0	1.92e-05	2.38e-03	-3.44e-03	-1.05e-02

PERE: Primary energy resources - renewable: use as energy carrier **PERM:** Primary energy resources - renewable: used as raw materials **PERT:** Primary energy resources - renewable: total **PENRE:** Primary energy resources - non-renewable: use as energy carrier **PENRM:** Primary energy resources - non-renewable: used as raw materials **PENRT:** Primary energy resources - non-renewable: total **SM:** Use of secondary material **RSF:** Renewable secondary fuels **NRSF:** Non-renewable secondary fuels **FW:** Net use of fresh water

Waste flows

Indicator	Unit	A1-3	A4	A5	C1	C2	C3	C4	D
HWD	kg	2.65e-01	4.96e-03	8.23e-02	0	1.92e-04	7.67e-02	2.67e-04	-3.88e-02
NHWD	kg	2.35e+01	9.94e-02	3.91e+00	0	3.85e-03	9.27e-01	4.42e+00	-3.63e+00
RWD	kg	1.38e-04	1.03e-06	2.40e-05	0	3.97e-08	5.44e-07	6.99e-08	-4.11e-05

HWD: Hazardous waste disposed **NHWD:** Non hazardous waste disposed **RWD:** Radioactive waste disposed

Output flows

Indicator	Unit	A1-3	A4	A5	C1	C2	C3	C4	D
CRU	kg	0	0	1.61e+00	0	0	0	0	0
MFR	kg	1.23e-02	0	3.98e-03	0	0	1.70e-01	0	0
MER	kg	0	0	0	0	0	0	0	0
EEE	MJ	3.36e-01	0	1.60e-01	0	0	2.49e+00	0	0
EET	MJ	7.47e-01	0	3.30e-01	0	0	4.87e+00	0	0

CRU: Components for re-use **MFR:** Materials for recycling **MER:** Materials for energy recovery **EEE:** Exported electrical energy **EET:** Exported thermal energy

Name	Value	Unit
Biogenic carbon content in product	9.47e-04	kg C
Biogenic carbon content in accompanying packaging	0.03	kg C

Additional requirements

Greenhouse gas emissions from the use of electricity in the manufacturing phase

Electricity consumption in the manufacturing phase is composed from the sources below certified by Guarantee of Origin. Electricity is represented by data in ecoinvent 3.10 regionalised for Germany.

Electricity	Unit	Value
Nuclear	kg CO ₂ -eq. / kWh	6.56e-03
Hydro	kg CO ₂ -eq. / kWh	0.72
Gas	kg CO ₂ -eq. / kWh	0.76
Oil	kg CO ₂ -eq. / kWh	0.95
Coal and peat	kg CO ₂ -eq. / kWh	1.05
On-site electricity, PV	kg CO ₂ -eq. / kWh	0.12

Dangerous substances

The product contains no hazardous substances given by the REACH Candidate List or the Norwegian Priority List.

Additional environmental information

Additional environmental impact indicators required in NPCR Part A for construction products

Indicator	Unit	A1-3	A4	A5	C1	C2	C3	C4	D
GWP-IOBC	kg CO ₂ -eq.	ND	2.27e-01	ND	0	8.81e-03	2.44e+00	7.05e-02	-1.28e+00

GWP-IOBC: Global Warming Potential - Instantaneous oxidation of biogenic carbon

Bibliography

DIN EN ISO 14025:2011-10	Environmental labels and declarations - Type III environmental declarations - Principles and procedures
DIN EN ISO 14040:2021-02	Environmental management - Life cycle assessment - Principles and framework
DIN EN ISO 14044:2021-02	Environmental management - Life cycle assessment - Requirements and guidelines
EN 15804:2012+A2:2019	Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products
DIN CENTR 15941:2010-11	Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data
DIN EN 15942:2022-04	Sustainability of construction works - Environmental product declarations - Communication format business-to-business
ISO 21930:2017-07	Sustainability in buildings and civil engineering works - Core rules for environmental product declarations of construction products and services
ecoinvent v3.10	ecoinvent, Zurich, Switzerland, database version 3.10
Eurobitume. (2025). Life Cycle Assessment 4.0 for bitumen. Brussels	European Bitumen Association (Eurobitume). Retrieved from https://eurobitume.eu/wp-content/uploads/2025/03/EB-LCA-4.0-2025.pdf
PCR	NPCR 022 Part B for roof waterproofing (v2)
EN 17388	Abdichtungsbahnen - Umweltproduktdeklaration - Produkt-Kategorie-Regeln für Bitumenbahnen mit Trägereinlage, Kunststoff- und Elastomerbahnen für Dachabdichtungen
EN 13956 Flexible sheets for waterproofing	Plastic and rubber sheets for roof waterproofing - Definitions and characteristics
EN 13707 Flexible sheets for waterproofing	Reinforced bitumen sheets for roof waterproofing - Definitions and characteristics
EN 544 Bitumen shingles with mineral and/or synthetic reinforcements	Product specification and test methods
	Basic principles and recommendations for describing the dismantling, post use, and disposal stage of construction products: https://www.umweltbundesamt.de/sites/default/files/medien/1410/publikationen/2020-07-06_texte_130-2020_guidance-document-construction-industry.pdf
	ILCD Handbook: https://epica.jrc.ec.europa.eu/uploads/ILCD-Handbook-LCIA-Background-analysis-online-12March2010.pdf

 epd-norway Global Program Operator	Program Operator	Phone	+47 23 08 80 00
	EPD Norway	Email	post@epd-norge.no
	Majorstuen P.O. Box 5250, N-0303 Oslo Norway	Web	www.epd-norge.no
 epd-norway Global Program Operator	Publisher	Phone	+47 23 08 80 00
	The Norwegian EPD Foundation	Email	post@epd-norge.no
	Post Box 5250 Majorstuen, 0303 Oslo Norway	Web	www.epd-norge.no
	Owner of the declaration	Phone	01755837403
	Carlisle Construction Materials GmbH	Email	andreas.koellner@ccm-europe.com
	Gothaer Straße 44, 99880 Waltershausen Germany	Web	none
	Author of the life cycle assesment	Phone	01755837403
	Carlisle Construction Materials GmbH	Email	andreas.koellner@ccm-europe.com
	Gothaer Straße 44, 99880 Waltershausen Germany	Web	none
	ECO Platform	Web	www.eco-platform.org
	ECO Portal	Web	ECO Portal
 EMIDAT	Developer of EPD generator	Phone	+49 176 56 96 77 91
	Emidat GmbH	Email	epd@emidat.com
	Sandstraße 33, 80335 München Germany	Web	www.emidat.com